

Online Research @ Cardiff

This is an Open Access document downloaded from ORCA, Cardiff University's institutional repository: <https://orca.cardiff.ac.uk/id/eprint/121191/>

This is the author's version of a work that was submitted to / accepted for publication.

Citation for final published version:

Muaaz-Us-Salam, Syed, Cleall, Peter John ORCID: <https://orcid.org/0000-0002-4005-5319> and Harbottle, Michael John ORCID: <https://orcid.org/0000-0002-6443-5340> 2019. The case for examining fluid flow in municipal solid waste at the pore-scale - A review. Waste Management and Research 37 (4) , pp. 315-332. 10.1177/0734242X19828120 file

Publishers page: <http://dx.doi.org/10.1177/0734242X19828120>
<<http://dx.doi.org/10.1177/0734242X19828120>>

Please note:

Changes made as a result of publishing processes such as copy-editing, formatting and page numbers may not be reflected in this version. For the definitive version of this publication, please refer to the published source. You are advised to consult the publisher's version if you wish to cite this paper.

This version is being made available in accordance with publisher policies.

See

<http://orca.cf.ac.uk/policies.html> for usage policies. Copyright and moral rights for publications made available in ORCA are retained by the copyright holders.



The Case for Examining Fluid Flow in Municipal Solid Waste at the Pore-Scale – A Review

AUTHOR NAMES

Syed Muaaz-Us-Salam **, Peter John Cleall*, Michael John Harbottle**

AUTHORS' ADDRESS

Geoenvironmental Research Centre, School of Engineering, Cardiff University, Wales, U.K. □


AUTHOR INFORMATION

Corresponding Author* **. Email: muaaz-us-salams@cardiff.ac.uk. ORCID: orcid.org/0000-0002-0848-8851

ABBREVIATIONS

MSW, Municipal solid waste; REV, Representative elementary volume; FLAC, Fast lagrangian analysis of continua; ERT, Electrical resistivity tomography; CFD, Computational fluid dynamics; NH, Neglects heterogeneity; IC, Ignores coupled phenomena; AD, Advection-dispersion; DP, Dual-porosity

Graphical abstract

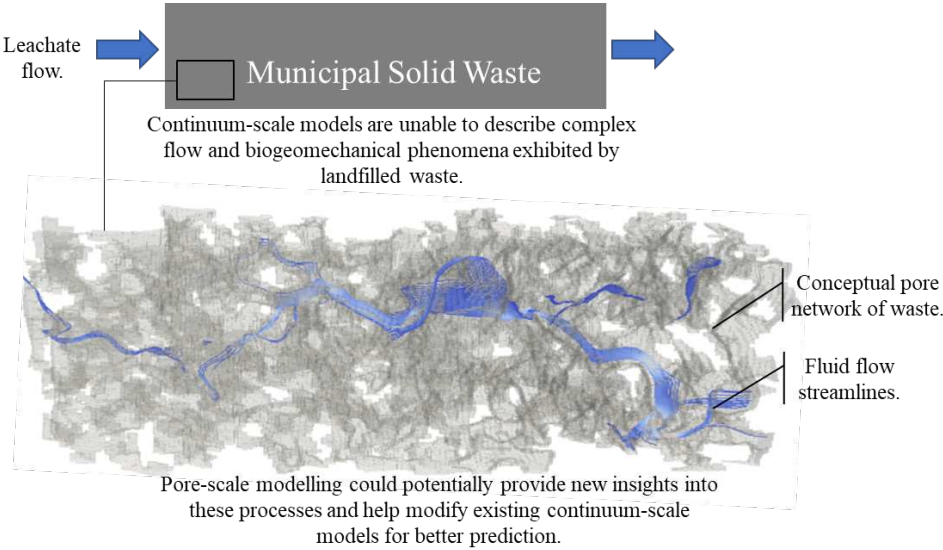

ABSTRACT

In this paper, we discuss recent efforts from the last 20 years to describe transport in municipal solid waste (MSW). We first discuss emerging themes in the field to draw the reader's attention to a series of significant challenges. We then examine contributions regarding the modelling of leachate flow to study transport via mechanistic and stochastic approaches, at a variety of scales. Since MSW is a multiphase, biogeochemically active porous medium, and with the aim of providing a picture of transport phenomena in a wider context, we then discuss a selection of studies on leachate flow incorporating some of the complex landfill processes (e.g. biodegradation, settlement). It is clear from the literature survey that our understanding of transport phenomena exhibited by landfilled waste is far from complete. Attempts to model transport have largely consisted of applying representative elementary-scale models (the smallest volume which can be considered representative of the entire waste mass). Due to our limited understanding of fluid flow through landfilled waste, and the influence of simultaneously occurring biogeomechanical processes within the waste mass, elementary-scale models have been unable to fully describe the flow behaviour of MSW. Pore-scale modelling and experimental studies have proven to be a promising approach to study fluid flow through complex porous media. Here, we suggest that pore-scale modelling and experimental work may provide valuable insights into transport phenomena exhibited by MSW, which could then be used to revise elementary-scale models for improved representation of field-scale problems.

KEYWORDS

municipal solid waste; modelling leachate transport; landfill; waste heterogeneity; preferential flow.

1. INTRODUCTION

Global municipal solid waste (MSW) generation is expected to increase at least threefold by the end of the century (Hoornweg and Bhada-tata, 2012; Hoornweg et al., 2013). Due to high production rates and landfilling being the most common method of waste disposal worldwide, a significant proportion of this waste is expected to go to landfill. Likewise, in parts of the world where disposal has moved away from landfilling, closed facilities will remain. As such, landfilling, at least for the foreseeable future will be of relevance to the waste sector. The leachate produced due to infiltration of net precipitation, typically contains dissolved heavy metals, recalcitrant organics and inorganics that could contaminate groundwater and surface water if allowed to escape from the landfill (Kjeldsen et al., 2002). As such, the fate of this waste water within the landfill mass and in the geoenvironment is of interest to environmental engineers and scientists (Remmas et al., 2017). In bioreactor landfills, the leachate may be recirculated through the waste mass to enhance degradation and methane recovery with the prospect of early stabilization of the landfill (Barlaz and Reinhart, 2004; Reinhart et al., 2002). Moreover, flushing technologies using water and/or other biotechnological agents have also been studied to accelerate landfill stabilisation and decrease its potential to contaminate the surrounding geoenvironment (Bolyard, 2016; Bolyard and Reinhart, 2016; Hettiaratchi et al., 2014; Hettiaratchi et al., 2015; Jayasinghe et al., 2014; Rashid et al., 2017). The aforementioned approaches may pave the way towards sustainable landfilling

(Jayasinghe, 2013; Jayasinghe et al., 2011, 2014; Jayasinghe et al., 2013; Rashid et al., 2017). However, for field-scale application and prediction, an understanding of the transport phenomena at play within the waste matrix, which will ultimately determine the effectiveness of flushing or recirculation techniques with the possibility of relatively early stabilisation of the landfill, is required.

MSW is a complex, biogeochemically active, heterogeneous porous medium (Barlaz et al., 1990). Due to its spatially and temporally varying nature (both within individual landfills and across the worldwide inventory), it is challenging to develop transport models with a realistic prospect of widespread applicability to MSW. However, it is important to note that models, no matter how complex, will always be a simplification of reality, and that the need and accuracy of models is often operationally defined. Early studies on flow were focused primarily on predicting the overall volume of leachate produced from an MSW sample under laboratory conditions (Ahmed et al., 1992; Demetracopoulos et al., 1986a; Demetracopoulos et al., 1986b; El-Fadel et al., 1997; Khanbilvardi et al., 1995; Korfiatis et al., 1984; Noble and Arnold, 1991; Zeiss, 1992). The most common approach to model the flow of leachate has consisted of applying the Richards equation to calculate the evolution of the leachate velocity in space-time while also incorporating the convection-dispersion equation to provide solute concentrations (Bendz and Singh, 1999; Demetracopoulos et al., 1986a; Demetracopoulos et al., 1986b; El-Fadel et al., 1997; Han et al., 2011; Haydar and Khire, 2005; Haydar and Khire, 2007; Khire and Kaushik, 2012; Khire and Mukherjee, 2007; Khire and Saravanathiiban, 2010; Korfiatis et al., 1984; Noble and Arnold, 1991). Extensive use of these mechanistic representative elementary volume (REV) (often defined as the smallest volume which can be considered representative of the entire waste mass) based models has been carried out to understand the flow behaviour of MSW (Rosqvist and Destouni,

2000; Rosqvist et al., 2005) with some studies focusing on conceptual models of the pore structure of MSW at the elementary scale (Han et al., 2011; Woodman et al., 2014, 2015; Woodman et al., 2013). However, to date, our understanding of the flow of leachate, biogas and the impact of other simultaneously occurring biogeochemical processes on flow and transport is incomplete, especially at the pore-scale. This is particularly important to note since it is these pore-scale processes, with the possibility of field-scale processes dominating particular facets at particular times, that ultimately govern the overall behaviour in reactive porous media (Blunt, 2001; Blunt et al., 2013; Menke et al., 2017; Xiong, 2015; Xiong et al., 2016). It is likely that processes average over a wide range of different scales, which would explain the success of the widely used empirical landfill gas models. The real challenge lies in the integration of modelling processes at all the scales and understanding how averaging works. It is clear that one of the most difficult aspects to model is the inherent heterogeneity of the waste mass, and the impact of different waste components (e.g. their shapes, sizes and varying biodegradation rates) and numerous coupled processes on the flow regime. In this paper, heterogeneity is referred to as the variability in the properties of MSW, while preferential flow is defined as the phenomenon where the leachate takes the path of least resistance through the waste mass and channels through the larger pores (Beaven et al., 2011; Dixon and Langer, 2006; Dixon et al., 2008a; Dixon et al., 2011; Dixon et al., 2008b; Kjeldsen and Beaven, 2011; Powrie and Beaven, 1999; Woodman, 2007).

The objective of this paper is to provide a case for examining fluid flow in municipal solid waste at the pore-scale. Following from El-Fadel et al. (1997), we pay particular attention to the development of the field within the last 20 years. Whilst attempting to make a case for moving past the REV this paper is not intended to provide an exhaustive overview of the field. Instead, we reflect on a focussed collection of recent key contributions with the aim of painting an accurate

picture of the state of the art, highlighting the limitations of and gaps in our knowledge to identify emerging themes in the field and provide suggestions for future work. We first discuss emerging themes in the field to draw the reader's attention to a series of significant challenges. We then examine contributions regarding the modelling of leachate flow and chemical transport via mechanistic and stochastic approaches, at a variety of scales. This is followed by consideration of contributions regarding leachate flow and chemical transport incorporating some of the complex landfill processes (e.g. biodegradation). We conclude with future needs and recommendations to improve our understanding of transport phenomena within MSW. Our recommendations are focused around obtaining pore-scale insights ([Figure 1](#)) into these processes with the ultimate aim of better field-scale prediction. We provide the literature search methodology as part of supporting information for this article.

2. EMERGING THEMES IN THE FIELD & MOTIVATION

As shown in [Table 1](#), in the last 20 years, work in the field has developed from consideration of homogeneous 1D models primarily focused on the liquid phase to representation of complex 3D transport processes (e.g. solute transport, biodegradation, settlement), and the interaction of these phenomena with the waste structure. However, from the literature discussed hereafter, it is evident that our understanding of the transport phenomena at play in MSW is far from complete.

As discussed in the following sections, elementary-scale models (e.g. the Richards equation) have been applied extensively in the last 20 years to study flow in MSW. While researchers have tried to consider the physical and biogeochemical processes taking place in the waste mass, current modelling approaches simplify these processes in comparison to the high level of complexity found in a typical MSW landfill system, likely adding to the discrepancies between experimental

data and models; all the while there is growing evidence that these complex processes play a significant role in transport through MSW. Of course, models are always a simplification of reality, and even coupling of relatively simple processes produces models that can be difficult to validate against typical, easily available datasets. However, validation exercises are vital to identify the range of validity of a particular model and its weaknesses. For instance a relatively recent model comparison exercise, which is explored in detail later, found inconsistencies between available models and their ability to predict experimental data from a well-constrained lab-scale MSW landfill (Beaven, 2008; Beaven et al., 2008), suggesting that perhaps our understanding of underlying coupled processes within the waste matrix needs improvement before reliable short-term and long-term predictions can be made. It is also important to note that models are made for a specific objective and in many cases the models are performing at an acceptable level to achieve that objective. An example of this is the use of landfill gas models in practice (for example GasSim (Golder Associates, 2012) is a widely used model in the UK) (Clewes et al., 2008). Such models are extreme simplifications of reality (e.g. based on zero or first-order decay functions) but match the measured trends well and are used to make operational decisions, even though our understanding of the underlying processes in the waste body is still quite poor. The same applies to the stoichiometric equations used in recent geochemical speciation modelling work for landfills (van der Sloot et al., 2017; van der Sloot et al., 2007). While this may be the case for models with a certain objective, when it comes to flow/transport models incorporating biogeomechanical phenomena to describe the landfill system and predict its behaviour, they are difficult to validate due to lack of complete data sets, and/or they become highly parameterized requiring empirical data to infer model parameters, and even then, the high number of degrees of freedom make it difficult to parameterize the models. Within this body of work, we have also found that there is a

significant lack of full validation of a number of flow and transport models which attempt to incorporate biogeomechanical processes, against real experimental or field data. Where model comparison exercises have occurred, discrepancies between modelled and experimental data are suggestive of our lack of understanding of the MSW system. As such, it is difficult to say at this moment in time whether these complex models are applicable to real-life scenarios for the operational needs of the waste industry.

Recent studies (Woodman, 2007; Woodman et al., 2017; Woodman et al., 2014, 2015; Woodman et al., 2013), contrary to previous work (Bendz et al., 1998; Bengtsson et al., 1994; Oman and Rosqvist, 1999; Rosqvist and Bendz, 1999; Rosqvist and Destouni, 2000; Rosqvist et al., 2005), have discovered that some tracers (e.g. lithium, deuterium) exhibit anomalous transport in MSW, with tracers previously thought to be geochemically inert (Oman and Rosqvist, 1999; Reinhart, 1989; Rosqvist and Destouni, 2000) in their passage through the pores of MSW being found to exhibit non-conservative transport (Woodman et al., 2014, 2015). Current mechanistic REV-based approaches have not been able to predict this behaviour; thus, we do not fully know what happens to these tracers as they travel through the pore space. Upon studying the impact of mechanical compression of the waste matrix on diffusion of different tracers with varying diffusivities, researchers have also found that while compression decreases the hydraulic conductivity block diffusion times do not vary significantly, contrary to predictions by continuum-scale models (e.g. Richards' equation), suggesting that our understanding of diffusive transport through MSW may not be entirely representative of real-life behaviour (Woodman et al., 2014). From anomalous tracer transport, to conceptual models of the structure of MSW, it is clear that our understanding of the role of MSW structure and its fluid-structure interaction with leachate as it travels through the pore space is incomplete and requires further development.

It is also clear that the structure of the waste plays a significant role in the transport of leachate. Generally, attempts to describe the structure as a homogeneous matrix have been unsuccessful, with leachate exhibiting preferential channelling. Typically, in attempts to describe preferential channelling, the waste structure has been split into two domains representing slow- and fast-moving water. It is possible that these dual-porosity/permeability models are an oversimplification of the complex flow behaviour exhibited by MSW, where the flow regimes are instead more likely to be a continuous spectrum rather than just two categories of flow. However, it is important to acknowledge that the simplifications within these models are a direct consequence of the intended purpose of modelling. If the purpose is understanding, then simplification allows a focus on the interaction of the main governing principles, if the purpose is prediction then the focus is interpolation and extrapolation. However, it is important to note here that it is likely that this preferential channelling, at least in part, is a direct consequence of the structure of MSW and the fluid-structure interaction exhibited by the system as the leachate flows through the pore network.

To further understanding of these phenomena, conceptual models of the waste structure have been proposed, where the waste mass is assumed to contain low and high permeability objects in layers. Here, preferential pathways occur through the large gaps between these objects, and advection dominates, whereas within these layers, diffusion dominates and occurs mainly in the horizontal direction within the more permeable layers (Bendz et al., 1998; Woodman et al., 2014). However, such proposed conceptual models of the structure of MSW are likely to be, at best, difficult to validate via continuum modelling approaches that are prevalent in the literature. As such, when considering transport of leachate in landfills, it may be necessary to adopt more complex models offered by REV approaches to add an extra layer of detail and consider the composition and hydraulic properties of MSW components and the resulting pore network. As

discussed below, it is likely that different waste components exhibit different permeability characteristics and may cause local variation of flow properties within the waste matrix (Muaaz-Us-Salam et al., 2017), and it might be important to take these into account, especially due to the ever-evolving pore-structure of MSW due to biodegradation, mechanical creep etc. (Fei, 2016; Fei and Zekkos, 2012; Fei and Zekkos, 2013; Fei and Zekkos, 2016; Fei et al., 2013; Fei et al., 2014a; Fei et al., 2014b, 2015, 2016).

3. MODELLING OF LEACHATE FLOW & SOLUTE TRANSPORT

In this section we consider the development of mechanistic and stochastic modelling approaches to represent leachate flow in MSW and seek to critically assess how well these models have been able to capture experimentally observed behaviour. Whilst a considerable number of studies have been reported e.g. (Abbaspour, 2005; Abbaspour et al., 2004; Al-Thani et al., 2004; Brun and Engesgaard, 2002; El-Fadel, 1999; Haydar and Khire, 2005; Islam et al., 2001; Olaosun, 2001; Oman and Rosqvist, 1999; Powrie and Beaven, 1999; Rosqvist and Bendz, 1999; Ünlü and Rowe, 2004), we discuss a selected few representative contributions in detail to highlight the significant issues.

3.1. Mechanistic techniques: Earlier studies on flow were focused on simple REV-based approaches, predominantly involving models treating MSW as a homogeneous porous medium based on Darcy's law incorporating advection-dispersion phenomena to represent solute transport (Ahmed et al., 1992; Bleiker et al., 1995; Chen and Chynoweth, 1995; Deeley et al., 1985; Demetracopoulos et al., 1986b; El-Fadel et al., 1997; Khanbilvardi et al., 1995; Pohland, 1980; Reinhart, 1995; Reinhart, 1996; Sykes and Farquhar, 1983; Sykes et al., 1982). For instance, the theory of unsaturated flow through homogeneous and isotropic porous media has been applied to

study flow through MSW by Korfiatis et al., 1984. Their model used a vertical 1D equation for downward flow through an unsaturated porous medium, considering the variation of moisture content with time, hydraulic conductivity with depth and a source-sink term. Overall, the agreement between the modelled and experimental data was poor. To our knowledge, this was one of the first recorded studies to demonstrate the existence of preferential flow and spatial variance of hydraulic properties of municipal solid waste. Much of this earlier work highlighted the unsuitability of assuming MSW to be a homogeneous, porous medium and the importance of including the heterogeneous nature of waste in the modelling framework.

In recent years, researchers have also used commercial codes and simulation software (e.g. HYDRUS, MODFLOW-SURFACT, COMSOL Multiphysics etc.) to model transport in MSW (Audebert et al., 2016a; Audebert et al., 2016b; Beaven et al., 2011; Fellner and Brunner, 2010; Haydar and Khire, 2005; Haydar and Khire, 2007; Khire and Kaushik, 2012; Khire and Mukherjee, 2007; Khire and Saravanathiiban, 2010; Kjeldsen and Beaven, 2011; Olivier et al., 2009; Saquing et al., 2012; Slimani et al., 2016; Tinet et al., 2011a; Tinet et al., 2011b). Amongst commercial codes, HYDRUS has been a recurrent choice for modelling flow through MSW (Fellner and Brunner, 2010; Haydar and Khire, 2005; Haydar and Khire, 2007; Khire and Kaushik, 2012; Khire and Mukherjee, 2007; Reddy et al., 2013). HYDRUS is based on a modified form of the Richards equation solved for saturated-unsaturated flow, and the advection-dispersion equation for solute and heat transport. The Richards equation may also be modified to include dual-porosity/permeability effects (Simunek and van Genuchten, 2008; Šimůnek et al., 2011). For instance, transport of phenol as a model contaminant in a laboratory-scale reactor containing simulated MSW has been studied and its transport modelled via HYRUS-1D (Saquing et al., 2012; Simunek et al., 2003; Simunek and van Genuchten, 2008). Solute transport in the liquid phase was

described by the advection-dispersion equation. When the combined effects of sorption and biodegradation on phenol transport were studied, the model was in very poor agreement with the data, yielding an inversely derived biodegradation rate that was two orders of magnitude higher than the independently measured rate, suggesting that transport through the MSW medium is complex and the fluid-structure interaction exhibited through the medium is of relevance for hydrological prediction.

In recent years, as demonstrated below, the scale of interest for modelling leachate transport has shifted from bench scale towards pilot- and field-scales, partly due to developments in computational capacity but also because engineers, waste managers and regulatory authorities are ultimately interested in the field-scale. For instance, researchers have adopted a kinetic wave model, first proposed by Beven and Germann (1981) for describing water flows in soils with macropores, to determine the channel flow in landfills (Bendz et al., 1998). A source/sink term was used to account for flow from and into the channel from the matrix (Beven and Germann, 1981). Upon moisture intrusion into the landfill due to precipitation or leachate recirculation, water would filtrate from the channel into the matrix domain, whereas during dry periods it would be released to the channel domain. They tested their approach against a pilot-scale MSW sample and found that the model could describe the arrival of the wetting front and the drainage front during unsteady flow, whereas it was not able to describe the observed dispersion through the MSW sample. Their work highlighted the unsuitability of assuming the flux laws through MSW to be strictly convective in nature, and the importance of considering the spatial variability of this porous medium for hydrological modelling.

A very popular mechanistic approach to modelling of flow has been to apply different formulations of the Richards equation, dividing the domain into two homogeneous and isotropic

overlapping continua (e.g. mobile and immobile regions of liquid) in an attempt to capture the complex pore space of MSW (Beaven et al., 2011; Di Bella et al., 2012; Di Bella et al., 2015; Fellner and Brunner, 2010; Han et al., 2011; Kjeldsen and Beaven, 2011; McDougall, 2011; Slimani et al., 2016; Statom et al., 2006; Tinet et al., 2011b). For instance, vertical flow in MSW samples at the pilot-scale has been investigated by Woodman et al., (2015) interestingly in their study lithium did not behave conservatively as a tracer. The positively skewed tracer breakthrough curves exhibited tailing, as observed in previous studies (Bendz et al., 1998; Oman and Rosqvist, 1999; Rosqvist and Bendz, 1999; Rosqvist and Destouni, 2000; Rosqvist et al., 2005). They compared advection-dispersion, dual-porosity and hybrid advection-dispersion/dual-porosity models. In the advection-dispersion approach, different processes responsible for non-uniform flow are essentially lumped together into the dispersivity parameter. The dual-porosity model consistently offered a better fit. The hybrid advection-dispersion/dual-porosity model only performed well when either advection-dispersion or dual-porosity behaviour dominated. This research shed light on the previously mentioned anomalous transport within MSW, in terms of REV domain-based modelling approaches, indicating that multi-porosity mechanisms may be significant, and considering the variety of components present in MSW (wood, paper, card, food waste etc.), this is entirely plausible (Athanasopoulos, 2008; Beaven et al., 2011; Dixon et al., 2011; Dixon et al., 2008b; Gotze et al., 2016; Grellier, 2007; Hossain, 2002; Koganti, 2015; Matasovic et al., 2008; Reddy et al., 2011; Reddy et al., 2009; Zekkos, 2005; Zekkos et al., 2010; Zekkos et al., 2008). For instance, researchers have studied the hydraulic properties of different MSW components (e.g. paper and wood (Ghane et al., 2014; Ghane et al., 2016; Han et al., 2011; Subroy et al., 2014)) where both these components' hydraulic properties could be described by dual-permeability Richards equations, but their intrinsic permeability varied by 1-2 orders of

magnitude, suggesting that if they were both present in a waste matrix, due to their varying hydraulic characteristics, it may not be possible to model the dual-porosity characteristics of the entire waste body by assigning them a single set of properties.

It is important to note that any model be it analytical or numerical is an approximation of real behaviour. Whilst analytical models cannot really handle heterogeneity, and therefore have lumped parameters, numerical models do allow us to include heterogeneity however, the number of parameters required make it very difficult to parameterize the models. All assumptions, the manner in which the models are implemented (reaction pathways/solution algorithms/numerical schemes) and how the boundary conditions are integrated into the model also have a significant impact on the model outcome. This could help explain why models based on the same governing equations, initial and boundary conditions can yield varying predictions (Beaven, 2008; Beaven et al., 2008).

The increasingly popular dual-porosity approach was recently tested against field-scale data by Woodman et al., (2017). Solute transport and horizontal fluid flow between well pairs in a saturated MSW landfill via the use of lithium and bromide tracers along with a fluorescent dye was investigated. Poor fits were obtained with the advection-dispersion model, while the dual-porosity model considered offered a better fit to the breakthrough curves. However, simply because dual-porosity models tend to fit the data better than others (likely due to the extra degrees of freedom in the equations) is not sufficient to conclude that this is absolutely and the only manner in which fluid flows through MSW, it is more of an indication that REV-based dual-porosity approaches are relatively better at describing the behaviour than other simpler REV-based approaches. This research also added to the growing body of evidence regarding the anomalous behaviour of lithium as a tracer in MSW (Woodman et al., 2014, 2015; Woodman et al., 2013).

More importantly, this anomalous behaviour highlights the significance of the fluid-structure interaction of the MSW with the mobile liquid, tracers and transport phenomena in general. Fitting parameters in a model to match data is an approach that is adequate if interpolation and limited extrapolation is the objective of model. Nevertheless, models developed to increase our mechanistic understanding should be based on independently determined material parameters. However, this is only practical for relatively small simple waste samples and upscaling to full-scale landfills will require some form of fitting (determination of parameters of a probability distribution), thereby moving the model away from its mechanistic basis.

Similar to the above, the Richards equation has also been applied to model leachate pumping and injection data at the field-scale by Slimani et al. (2016). They tested the Richards equation under homogeneous conditions, as well as stratified conditions by decreasing the permeability with depth in order to represent ‘real-life’ conditions, drawing support from the conceptual model of the layered structure of MSW first presented by Bendz and Singh (1999). They found the homogeneous assumption to be inappropriate to describe the flow behaviour, and that consideration of stratification yielded better fits to the data. It should be noted that REV-based modelling approaches, where the domain is essentially homogenized, albeit segmented in some approaches, as discussed above, may not be entirely suitable to carry out a deeper investigation into the role of the structure of MSW, or that of its different components and their dual-/multi-porosity characteristics. This is because the transport processes at play take place inside the pores of this porous medium and it is likely that it is their multi-scale behaviour that governs transport at the field-scale. In another study, researchers developed a dual-porosity flow model to study the flow of leachate to vertical wells (Ke et al., 2018). As is typical for this type of model, the waste mass was divided into matrix and fracture domains, whereby flow could occur horizontally and

vertically towards the vertical well with the possibility of mass exchange between the two continua. Sensitivity analysis indicated that the hydraulic properties of the fracture domain influence leachate drawdown more so than those of the matrix domain. Interestingly, the degree of anisotropy (horizontal hydraulic conductivity \div vertical hydraulic conductivity) was found to have a negative impact on leachate drawdown as it gets sequentially harder for leachate to flow vertically. Furthermore, the authors also tested their model against field-scale drawdown test data. Whereby upon fitting the data to the proposed model to obtain parameters such as hydraulic conductivities of the fracture and matrix continua, the authors were able to obtain a reasonably good fit. Their study shed light on the need for field-scale data which is required to inform current elementary-scale models, without which the predictive capabilities of current elementary-scale models are very limited.

Researchers have also applied electrical resistivity tomography (ERT) subsurface modelling to understand the flow in two landfill cells and subsequently model the flow of leachate within them (Audebert et al., 2016a; Audebert et al., 2016b). Despite the inherent heterogeneity of landfilled waste, similarities between the leachate injection experiments were reported. They proposed a hydrodynamic model (based on the dual permeability model in HYDRUS-2D) with one parameter set to predict leachate flow for the waste deposit cells. Similar to recent studies, they found the dual continuum approach better described the flow of leachate in comparison with the single-continuum assumption (Han et al., 2011; Woodman, 2007; Woodman et al., 2017; Woodman et al., 2014, 2015; Woodman et al., 2013).

3.2. Stochastic and probabilistic modelling: Instead of mechanistic approaches, some researchers albeit comparatively few in number, have adopted stochastic and/or probabilistic modelling approaches (McCreanor and Reinhart, 1999, 2000; Reinhart et al., 2002; Rosqvist and

363 Destouni, 2000; Rosqvist et al., 2005; Zacharof and Butler, 2004a, b). For instance, the U.S.
364 Geological Survey's saturated-unsaturated transport model (SUTRA) has been applied to model
365 flow in MSW in homogeneous anisotropic and heterogeneous waste masses (McCreanor and
366 Reinhart, 1999, 2000) using a stochastic approach to model the heterogeneous nature of MSW.
367 They used normal, exponentially increasing and exponentially decreasing probability density
368 functions to model the frequency-hydraulic conductivity relationships for anisotropy and
369 heterogeneity. The flow in the model itself was described by a general form of Darcy's law (Voss,
370 1984). They compared results for the homogeneous, isotropic case, due to low computation times,
371 against field data for cumulative leachate volumes generated and found errors ranging from 27 to
372 160%, indicating the unsuitability of modelling the waste mass isotropically. They discussed that
373 the discrepancies were likely due to preferential flow. Overall, their study was one of the first to
374 highlight the possibility of applying stochastic approaches to tackle the problem of waste
375 heterogeneity. Similarly, a probabilistic Lagrangian modelling approach was adopted to interpret
376 tracer breakthrough curves by (Rosqvist and Destouni, 2000; Rosqvist et al., 2005). To account
377 for preferential flow, they divided the domain into mobile and immobile water (Hopmans et al.,
378 2002; Kohne et al., 2009; Simunek et al., 2003; Simunek and van Genuchten, 2008; Vereecken et
379 al., 2016). Likewise, another approach divided the waste into regions of fast and slow flow paths,
380 where the solute advection variability between these fast and slow flow paths was described by a
381 bimodal probability density function (BIM). The tracer breakthrough curves had a long tail, and
382 the early peaks were indicative of rapid solute transport in preferential flow paths, while the
383 prolonged tails were possibly due to transport in the slow regions. Overall, the experimental work
384 indicated the existence of nonuniform transport. Interestingly, the authors claimed that the MIM
385 model was able to fit to the data adequately, however, the dispersivity values were unreasonably

high suggesting that the spreading of the breakthrough curves could not be explained by local dispersion alone. The BIM model achieved good agreement with the tracer tests. Interestingly, the model interpreted that 90% of total water flow occurred through 47% of the water content of the waste sample, suggesting that preferential flow dominated the flow regime. This study showed that the landfill system cannot be described by models based on homogeneous isotropic media and indicated that two-domain models are better at describing transport through MSW. Interestingly, recent work (Caicedo-Concha, 2016; Caicedo-Concha et al., 2011; Caicedo, 2013; de Vries et al., 2017; Kohne et al., 2009; Simunek et al., 2003; Simunek and van Genuchten, 2008; Vereecken et al., 2016) has suggested that different MSW fractions affect flow in different ways and as such, the validity of assigning the same immobile region characteristics to the entire waste matrix is debatable. Of course, the suitability of adopting such assumption depends significantly on the objectives of the model, as accuracy is operationally defined and not an absolute term.

4. MODELLING OF LEACHATE & GAS TRANSPORT INCORPORATING DEGRADATION & DEFORMATION

Here, we consider the development of modelling approaches to represent leachate flow in MSW coupled with biogeomechanical processes occurring within the waste mass. Within this body of work, we demonstrate that there is a significant lack of validation against real experimental or field data. Where validation has occurred, the differences between modelled and experimental data suggest a lack in our understanding of the MSW system as a whole. For instance, as noted earlier a recent model comparison exercise was conducted where modellers were provided with set-up and operational data for two experimental lab-scale landfills and invited to submit predictions for variables such as waste settlement, gas generation, changes in leachate chemistry etc. (Beaven,

2008; Beaven et al., 2008; Clewes et al., 2008; Ivanova et al., 2008; Lobo et al., 2008; McDougall, 2008; Reichel and Haarstrick, 2008; White, 2008; White and Beaven, 2013). The majority of the models underpredicted the cumulative biogas production, with one of the models overpredicting the yield (for one of the experiments, by almost twofold). Most of the models predicted the trends in data such as settlement and volatile fatty acid concentrations with varying degrees of accuracy. Detailed descriptions of some of these models and their underlying frameworks are discussed later.

To describe two-phase flow (gas, liquid) in landfills, REV-based models obeying Darcy's law overall, and in some instances explicitly modelled via variants of the Richards equation, with van Genuchten functions to describe relative permeabilities of leachate and gas, have been applied widely (Feng and Zhang, 2013; Feng et al., 2017; Feng et al., 2015; Feng and Zheng, 2014; Feng et al., 2016; Kindlein et al., 2006; Sanchez et al., 2006; Sanchez et al., 2007, 2010; White and Beaven, 2013; White et al., 2011; White et al., 2014). As a typical example, Reddy et al. (2014) applied the finite-difference based Fast Lagrangian Analysis of Continua (FLAC) model to simulate two-phase flow in bioreactor landfills. They assumed leachate and biogas to be immiscible fluids whose flow was governed by leachate saturation and capillary pressure (pressure difference between pore water and pore gas). The flow of these two fluids was described via Darcy's law, and the relative permeabilities were related to the saturation of the waste via van Genuchten functions (van Genuchten, 1980). Upon validation against data obtained from the literature (-laboratory & field-scale) & similar single-phase modelling work, the authors claimed that FLAC was on par with currently available/used models.

4.1. Implicit and explicit modelling of biogeomechanics. Likewise, variants of the two-phase approach have been coupled with models of other biogeomechanical processes in landfills in attempts to describe the whole system. For instance, a 2D multiphase flow and transport model

incorporating degradation was presented by Kindlein et al., 2006. They modelled the landfill system as a homogeneous domain arguing that the landfill heterogeneity at the field-scale can be neglected, which, as previously discussed, may not be a suitable assumption. The hydraulic model for multiphase flow was based on the work of Bear and Helmig by applying Darcy's law for fluid flow incorporating diffusion and dispersion (Bear, 1972; Helmig, 1997). The relative permeability of waste and gas was based on the Brooks and Corey functions (Brooks and Corey, 1964). Monod kinetics was employed to model biodegradation and the evolution of organic compounds with time. Biodegradation was coupled with multiphase flow implicitly by including sinks and sources in the multiphase equations for leachate and biogas. Although they did not validate their model against field-scale or laboratory-scale data, their model suggested that leachate tends to move preferentially around regions of waste exhibiting gas production. Overall, their study showed the possibility of modelling flow of leachate and gas exclusively, while considering biodegradation as sources and sinks instead of explicitly modelling individual degradation stages. However, their study lacked the inclusion of the inherent heterogeneity of the waste, which might have impacted their results.

In many instances, many of the two-phase flow models in the literature have not been fully tested against experimental or field-data, and where reported, the agreement between these types of models and measured data has been poor. For instance, a hydro-bio-mechanical model to represent the behaviour of landfilled waste has been developed (Datta et al., 2017; Kazimoglu et al., 2006; McDougall, 2007; McDougall, 2011). The hydraulic model was based on the 2D formulation of Richards' equation, and the van Genuchten parameters were used to express the relationship between suction and moisture content in order to solve unsaturated flow scenarios. The biodegradation model was based on modelling individual anaerobic degradation reactions

explicitly (hydrolysis, acetogenesis, methanogenesis). However, the biodegradation model assumed a perfectly-mixed two-stage anaerobic digester, while all the degradable waste was classified as cellulose in the modelling of these reactions. Recently, Datta et al. applied this model to a laboratory-scale experiment studying coupled processes in MSW (Datta et al., 2017). The overall predicted methane generation volume was more than double the experimental value, suggesting that approximating all the degradable content of MSW as cellulose for modelling purposes is likely an unsuitable assumption, particularly due to the presence of hemicellulose and the more recalcitrant, lignin components of the biodegradable matter within MSW. Similarly, researchers have developed a 3D two-phase flow model for leachate and gas flow in landfills (Feng et al., 2018; Feng et al., 2017). As with Kindlein et al. (2006) they modelled the leachate and gas flow via Darcy's law, with source-sink terms for gas and leachate resulting from biodegradation from the landfill, ignoring intermediate degradation products (Feng and Zhang, 2013; Feng et al., 2017; Feng and Zheng, 2014; Feng et al., 2016; Kindlein et al., 2006). The relative permeabilities were modelled by adopting the van Genuchten and Mualem model and assuming that gas and leachate are immiscible, the porosity of the waste remains constant and isothermal conditions prevail (Mualem 1976; van Genuchten 1980). Comparison against field data for spatial variation of pore water pressure showed poor fits, and the authors discussed the possibility of heterogeneity of the waste hydraulic properties causing disagreements between measured and predicted data. This study highlighted the importance of considering the flow of leachate and gas as coupled phenomena, and the unpredictability that arises in modelling these phenomena when the waste structure and its heterogeneity are not considered, as is typical of REV-based modelling strategies.

In addition to modelling two-phase flow with biogeomechanical processes, some researchers have opted for a compromise between modelling biodegradation explicitly, reaction-by-reaction

(McDougall, 2007; Kindlein et al., 2007) and simply including it as a source-sink term by modelling bulk biogas generation as a first-order process. For instance, a 2D coupled hydro-bio-mechanical model was recently developed (Reddy et al., 2017a; Reddy et al., 2017b). The two-phase hydraulic model was based on Richards' equation, where the biogas and leachate were considered immiscible and the relative permeabilities of the leachate and gas were modelled via the van Genuchten model. A Mohr-Coulomb based plane-strain plasticity model was adopted to model the settlement of the waste. USEPA's LandGEM model was used to model first-order biodegradation of the waste mass (USEPA, 2005). It should be pointed out that whilst this model has not been verified against field data as of yet, the authors have performed parametric case studies to identify the importance of certain parameters to inform bioreactor landfill design. Their modelling framework does not consider heterogeneity of the hydraulic, biochemical and geotechnical properties of the waste mass, which would likely impact their model's predictions at the field-scale. Their framework also assumes a first order bulk gas generation and degradation behaviour from the waste mass. Recent evidence has shown that different MSW components which are biodegradable exhibit variable degradation behaviour and that lignin-rich components of MSW generally do not undergo biodegradation in the landfill environment (Jayasinghe et al., 2014; Krause et al., 2017; Krause et al., 2016; Muaaz-Us-Salam et al., 2017; Wang, 2015; Wang and Barlaz, 2016; Wang et al., 2015; Wang et al., 2011; Wang et al., 2013; Warwick et al., 2018; Ximenes et al., 2015; Ximenes et al., 2008). Overall, their studies have provided valuable insights into the importance of coupled processes in designing bioreactor landfills for leachate recirculation and early stabilization of the waste mass.

4.2. Consideration of heterogeneity. In addition to coupling biogeochemical processes with the aforementioned two-phase REV-based approaches, some researchers have also attempted to

capture the heterogeneity of the waste mass (McCreanor and Reinhart, 1999, 2000; Sanchez et al., 2006; Sanchez et al., 2007, 2010; Zacharof and Butler, 2004a, b). For example, flow has been modelled stochastically through MSW incorporating waste heterogeneity and biogas production (McCreanor and Reinhart, 1999, 2000; Zacharof and Butler, 2004a, b) . In the latter model, biochemical pathways (hydrolysis, acetogenesis and methanogenesis) were modelled individually for the various components of the organic fraction represented by carbohydrates, fats and proteins. Model molecules for each of these components were chosen and growth/decay functions were used to model the rates of change in the molar mass of these components during hydrolysis, acetogenesis and methanogenesis. Flow was modelled stochastically to include the effects of waste heterogeneity by taking the overall flow through the landfill to be time invariant. It was also assumed that the flows through the waste were log-normally distributed against the average vertical water velocities. The statistical velocity model was then used to calculate the travel times of the leachate particles by using the random function given by the ratio of the distance travelled to the average velocity experienced. Since time was the key variable in the hydrological and biochemical modules, it was used as the basis to produce the integrated model with the overall aim of predicting leachate and biogas compositions. However, similar to other field-scale models discussed in this section, testing against actual field data was not reported. It should also be noted that whilst stochastic modelling may be suitable to fit experimental data and gain some insight into the flow regime of the porous medium, unlike mechanistic approaches, it is not an ideal way to gain in-depth understanding of the physics and biogeochemistry of these phenomena. In another attempt to consider the impact of the inherent heterogeneity of MSW on flow and biogeochemical phenomena, a 3D model for biodegradation, and flow of landfill gas and leachate has been developed (Sanchez et al., 2006; Sanchez et al., 2007, 2010). They modelled individual aerobic

and anaerobic degradation reactions by employing Suk et al. and Lee et al.'s models for the dissolved carbon, its conversion to organic acids and the rate of growth of microorganisms.(Lee et al., 2001; Suk et al., 2000) They then employed El-Fadel et al.'s strategy to model the bulk biodegradation of the waste by including relative biodegradability of certain fractions (El-Fadel et al., 1996; El-Fadel, 1996). The biodegradation module linked with the standard convection-diffusion-reaction equation to model the concentration of landfill gas. Their hydraulic model was based on Richard's equations, while the relative permeabilities of gas and leachate were modelled via van Genuchten functions. They considered heterogeneity of the waste mass by introducing spatial variation of permeabilities and porosities in 3D by employing the sequential Gaussian simulation technique. Although they did not test their model against actual field data, they simulated a variety of scenarios for homogeneous and heterogeneous landfills. In summary, their study demonstrated the impact of waste heterogeneity on flow of leachate and gas, and the significance of including two-phase flow to realistic modelling of landfill processes, since the inter-phase interactions impact the gauge pressure within the waste mass and influence the stability of landfills. (Table 1 here)

5. FUTURE NEEDS & RECOMMENDATIONS

In light of the state of the art reviewed above, we identify the following challenges and on this basis, provide recommendations for future research needs and potential multidisciplinary approaches to address them.

- (1) **The 'black box' of waste** – As perhaps suggested by other researchers, we recommend that gaining a better understanding of the aforementioned challenges requires penetrating the 'black box' of waste. To achieve this an extra layer of detail is required in our current

continuum-scale understanding of transport. For instance, geophysics and petroleum engineering literature is rich with contributions successfully exploring transport in permeable geological media at the pore-scale (Bijeljic et al., 2011; Blunt, 2017; Blunt et al., 2013; Mostaghimi, 2012; Mostaghimi et al., 2010; Mostaghimi et al., 2012; Mostaghimi et al., 2016; White and Beaven, 2008). Currently, a popular approach to modelling transport at the pore-scale involves using micro-CT X-ray scanning techniques to provide image data which are compiled to produce a digital 3D representation of pore-structure which is then used to define the modelling domain for flow simulations via various methods (e.g. Lattice-Boltzmann, Navier-Stokes, [Figure 1](#)) (Abdelhay et al., 2016; Al-Gharbi and Blunt, 2005; Al-Kharusi and Blunt, 2007; Al-Khulaifi et al., 2017; Bijeljic et al., 2013; Bird et al., 2014; Boon, 2017; Davit et al., 2013; de Vries et al., 2017; Graveleau et al., 2017; Guibert et al., 2016; Larachi et al., 2014; Liu et al., 2017; Menke et al., 2016; Menke et al., 2017; Pereira Nunes et al., 2015, 2016; Piller et al., 2014; Quintard, 2015; Raeini et al., 2013; Raeini et al., 2012; Roman et al., 2016; Seetha et al., 2017; Soulaine et al., 2011; Soulaine et al., 2016). We suggest that studying flow and transport at the pore-scale in MSW would help us understand the complex mechanisms involved and generate vital information which can then be used to inform and/or modify our existing models for better prediction. For instance, micro-CT (depending on the resolution and sample size) might also be able to identify the pores within different MSW components (wood, food waste etc.) and with the help of pore-scale computational fluid dynamics (CFD) simulations, could shed light on the dual-porosity/permeability characteristics of MSW at the component-level and their role in impacting flow through the pore space.

- (2) **Fluid-structure interaction** – The variable nature of MSW composition, and the resulting fluid-structure interaction resulting from various biogeochemical processes needs to be better understood, with particular attention to biodegradation, mechanical creep and other processes that result in a transient system with an evolving pore space (Caicedo, 2013). In order to understand the fluid-structure interactions and similar processes well, it may be beneficial to study the structure at the component-scale, including the packing between different components, as well as flow through individual material types, for instance, the fluid-structure interactions resulting from wood might be different to those resulting from food waste (Caicedo-Concha, 2016; Caicedo-Concha et al., 2011).
- (3) **Heterogeneity** – Throughout this paper it has been evident that researchers have found the multiscale heterogeneity of MSW, paired with other factors discussed above, has resulted in preferential flow and added to the complexity of modelling flow through this porous medium. This has been, and likely will continue to be, a significant challenge. Measuring and quantifying the variability of waste components in the matrix, their arrangement and the resulting multiscale heterogeneities is challenging, and has not been, to date, fully investigated. However, this review has highlighted how understanding the impact of heterogeneity on flow through MSW is an integral part of improving our predictions. Here we offer some suggestions to study heterogeneity. As discussed above, pore-scale experimental and modelling investigations of flow will likely improve our understanding of transport mechanisms. Fractal theory has been widely investigated in the sciences to study the inherent irregularity in nature and natural phenomena (Dekking et al., 1999; Hutchinson, 1981; Mandelbrot, 1982; West et al., 1997). Recently, fractals have also been applied to porous media to study the properties of pore structures including multifractal analyses and

their ability to quantitatively describe multi-scale pore-structure heterogeneities (Bird et al., 2006; Bird et al., 2000; Caplan et al., 2017; Gibson et al., 2006; Jaya et al., 2013; Liu and Ostadhassan, 2017; Lopes and Betrouni, 2009; Morató et al., 2017; San José Martínez et al., 2010; Wang et al., 2016a; Wang et al., 2016b; Xie et al., 2010; Xu, 2015; Xu et al., 2015; Zhang et al., 2014). We suggest that this line of inquiry combined with pore-scale modelling of flow might help us quantitatively relate heterogeneity of MSW to the spatial distribution of its components and their individual dual permeability characteristics. It might also help us quantitatively determine the changes in heterogeneity due to the evolution of the pore space due to biogeochemical processes at a variety of scales to study their impact on transport phenomena.

(4) **Data and sources of error** – Thus far, this paper has discussed modelling efforts to describe fluid flow in MSW, as well as fluid flow and transport incorporating biogeomechanical phenomena. In making the case for pore-scale modelling in MSW, a crucial focal point is the data that is required to study flow, transport and biogeomechanical processes and validate pore-scale modelling efforts. Since to the best of our knowledge such experimental data is sparse, within the context of MSW, it is important to explore possible experimental techniques and ideas at the pore-scale which could help in generation of data to gain a better understanding of the above to study and model these processes at the pore-scale. Following this, since the ultimate scale of interest is the field-scale, exploring the integration of insights obtained from pore-scale experiments and models into existing elementary/field-scale models could perhaps form the next step. [Figure 2](#) shows some of the processes that take place in the MSW system. Studying these processes at the pore-scale could be addressed with micro-model experiments combined with modern imaging techniques currently widely

used in digital rock physics work (Blunt et al., 2013; Xiong et al., 2016). Micromodel experiments in pore-scale literature have been vital in understanding fluid properties and fluid flow in permeable media. For instance, researchers have successfully used these techniques for investigating the evolution of the pore space in certain rocks due to typical geochemical dissolution reactions whereby the pore space is modified (Al-Khulaifi et al., 2017; Blunt, 2017; Menke et al., 2016; Menke et al., 2017). However, detailed examination and review of these experimental techniques and possible lines of experimental inquiry are beyond the scope of this paper. (Fig. 1 here)

While pore-scale investigation of fluid flow and biogeochemical processes might lead to new insights, as is the case with any experimental/modelling technique, sources of error and challenges will arise. One of the key points addressed in this paper has been the heterogeneity of the waste. This inherent heterogeneity makes representative sampling of a waste body very difficult and casts doubt on extrapolating the conclusions from one particular study to another. Pore-scale studies with micro-model experiments/models will likely encounter these doubts and difficulties. However, the purpose of this line of work would be to further understanding of the fundamental processes of the MSW system and the interaction between the different processes from Figure 2. What does this mean for currently existing models? Hopefully, experimental and numerical pore-scale studies as described above, when put against currently existing data at the lab and field scales will help in establishing a relationship between scaling of flow/transport and biogeochemical/physical processes. This relationship between the scales should then help in understanding how averaging will work to upscale from the pore-scale, to the centimetre scale, up to the metre scale, leading all the way up to the field scale. (Fig. 2 here)

635 In conclusion, modelling transport phenomena in MSW is challenging due to its inherent multi-
636 scale heterogeneity and ever-evolving pore space due to various biogeochemical/physical
637 processes. Continuum-scale models have not been able to sufficiently describe transport due to the
638 impact of the aforementioned processes. We suggest studying transport at the pore-scale to further
639 our understanding of transport within the pores of the waste, since it is these pore-scale processes
640 that ultimately govern transport at the field-scale. The insights obtained could then be used to
641 modify existing continuum-scale models for better prediction.

ACKNOWLEDGMENTS

We thank Jose Javier Munoz Criollo and Steven Warwick for fruitful discussions on modelling coupled phenomena in landfilled waste, the reviewers for their constructive comments and the funding bodies for their financial support. For the graphical abstract, we used the X-ray micro-CT images from the following repository to generate our 3D pore structure and subsequent mesh for the pore-scale simulations, which is gratefully acknowledged (<https://www.digitalrocksportal.org/projects/11>) (Muljadi et al., 2016).

Author Contributions. The manuscript was written through contributions of all authors. All authors have given approval to the final version of the manuscript.

Funding Sources. Financial support was provided to the first author by Cardiff University and Environmental Research and Education Foundation.

The authors have no competing interests to declare.

Supporting Information Available. Initial literature search strategy (Table S1), subsequent pathways and sources (Table S2) have been provided as part of the supporting information for this article.

663 **Table 1.** An overview of recent transport models.


664

Author(s)	Objectives	Features	Assumptions & Limitations
Bendz and Singh (1999); Bendz et al. (1998)	Modelling of unsteady water flow in landfilled MSW, later modified for solute transport.	DP under steady and transient conditions incorporating solute transport.	1D, NH, IC.
McCreanor and Reinhart (1999, 2000)	Better understanding of leachate movement mechanisms.	Stochastic modelling incorporating heterogeneity.	2D, IC.
Suk et al. (2000)	Develop a numerical model to compute leachate quality, gas composition, and gas pressure distribution over time in a landfill.	2-phase, multispecies solute transport incorporating biodegradation.	1D, NH and DP, ignores impact of biodegradation.
Rosqvist and Destouni (2000)	Study and quantify water and solute transport through preferential flow paths in biodegraded MSW by model interpretation of experimental BTCs.	DP, under steady and transient conditions.	IC, NH, unable to explain spreading of breakthrough curves.
Zacharof and Butler (2004a, b)	Mathematical modelling of the landfill environment.	Stochastic modelling incorporates biodegradation and waste heterogeneity.	Unable to simulate transient fluxes, limited testing against field data.

Rosqvist et al. (2005)	Study and quantify pollutant concentrations after long-term leaching at relatively low flow rates and residual concentrations after heavy flushing of an MSW sample.	Transfer function model able to simulate tracer BTCs.	IC, NH, overpredicting tracer concentrations.
Statom et al. (2006)	Simulate the overall trend in chloride concentration from a closed landfill cell.	DP, able to predict long-term leachate concentrations.	IC, NH, steady-state conditions only, failed to predict high chloride concentrations.
Kindlein et al. (2006)	Numerical analysis of coupled transport and reaction processes inside landfills.	2-phase transport incorporating degradation, heat and heterogeneity.	2D, neglects relative biodegradability of different components and DP.
(Garcia de Cortazar and Tejero Monzon, 2007; Garciadecortazar and Monzon, 2007)	Simulation of the hydrological and biodegradation behavior of MSW landfills.	Able to calculate daily leachate flow, organic pollution and the generation and composition of biogas in landfills.	Impact of waste mechanics neglected, limited classification of biodegradable matter.
McDougall (2007)	Integrated analysis of the hydraulic, biodegradation and mechanical behavior of MSW.	Coupled biodegradation, hydraulics, mechanics.	No DP, NH, simplifies waste to cellulose, resulting in overestimation of biogas.(Datta et al., 2017)

Sanchez et al. (2010)	Generation and transport of the major gaseous components of landfill gas. Study flow of both the leachate and the gases. Leachate distribution in a bioreactor landfill, evaluate the performance of drainage blankets as leachate recirculation systems.	Coupled 3D, 2-phase reactive-transport, incorporating biodegradation and heterogeneity.	Neglects DP, biodegradability and rates of degradation of different components.
Reddy et al. (2013, 2014, 2015)	Leachate distribution in a bioreactor landfill, evaluate the performance of drainage blankets as leachate recirculation systems.	2-phase flow.	Gas and leachate considered immiscible, IC, NH.
Woodman et al. (2013, 2014, 2015, 2017)	Quantification of the flow and transport of leachate in pilot- and field-scale MSW.	DP, also developed a DP-AD hybrid.	IC, DP, NH, failed to predict at the laboratory-scale.
Slimani et al. (2016)	Describe the flow around a well during pumping and injection at the field scale.	Simulates response to pumping and injection, exponential relationship between hydraulic conductivity and depth used.	No DP, anomalous behaviour at the transition phases, IC.
Feng et al. (2013, 2014, 2015, 2016 2017a,c)	Investigate the hydrodynamic and biochemical behavior within a bioreactor landfill subjected to leachate recirculation.	3D 2-phase model with biogas generation.	Gas and leachate regarded as immiscible, ignores mechanical effects of biodegradation, NH.

665	De Donno and Cardarelli (2017)	Evaluate the benefit of a priori information for the characterisation of landfills.	Data-driven, utilizes resistivity and chargeability to limit variation of parameters.	IC, 2D snapshots of the landfill, dependent on ERT sensor-placement, NH.
666	<i>Note: NH, Neglects heterogeneity; IC, Ignores coupled phenomena; AD, Advection-dispersion; DP, Dual-porosity; BTC, Breakthrough</i>			
667	<i>curve</i>			

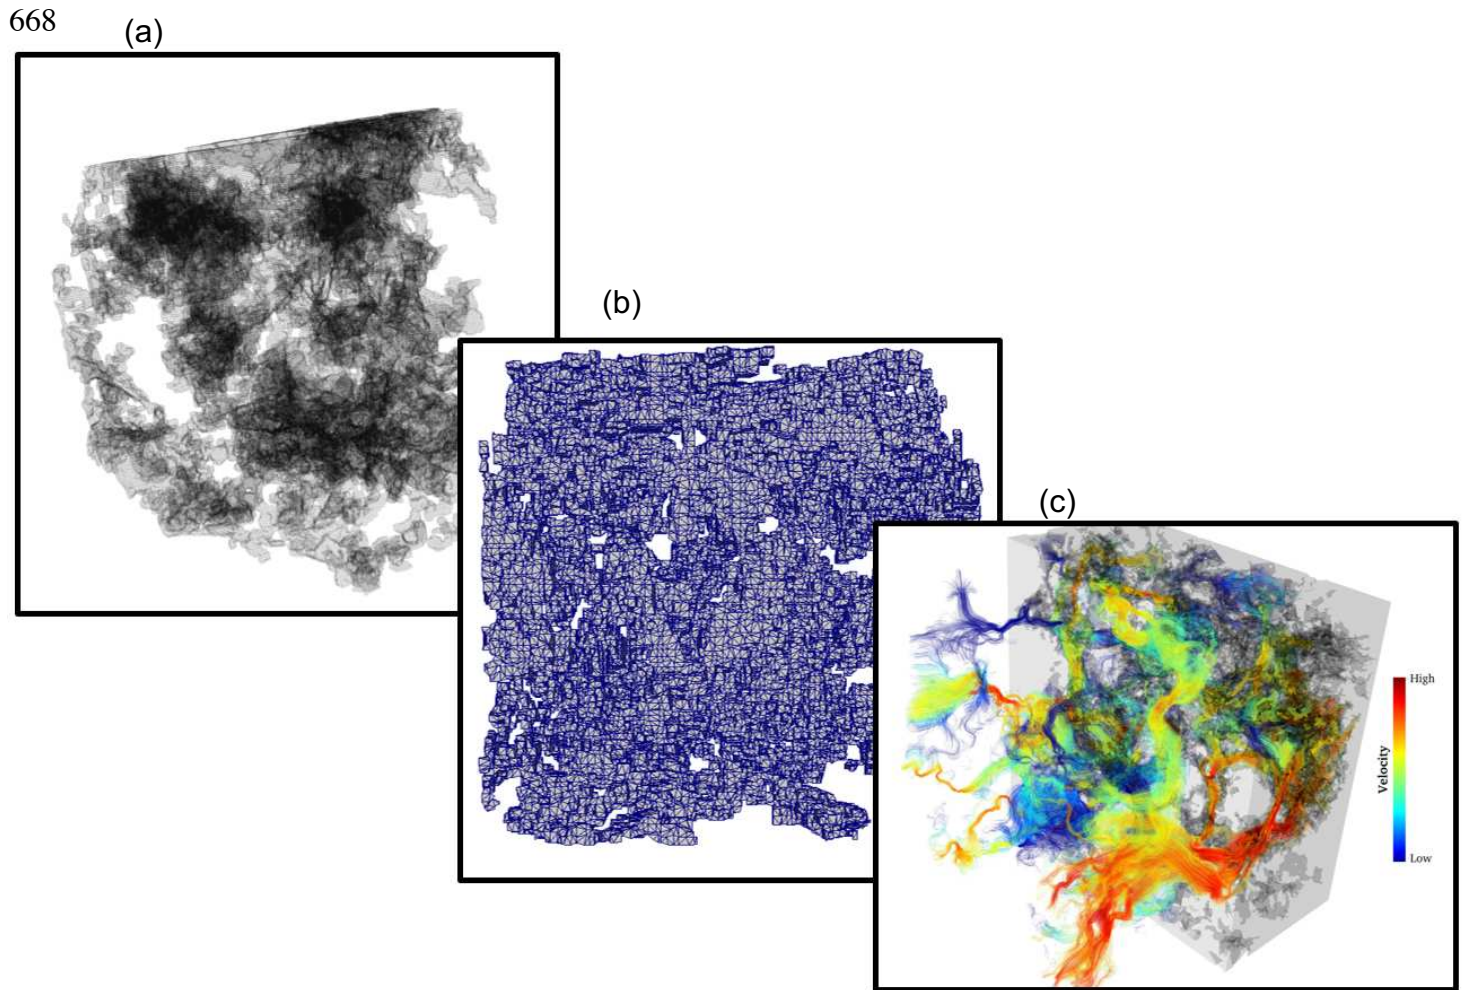

669 **Figure 1.** Schematic of a pore-scale simulation. (a) Scanning, (b) pre-processing, (c) CFD
670 simulation.
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687

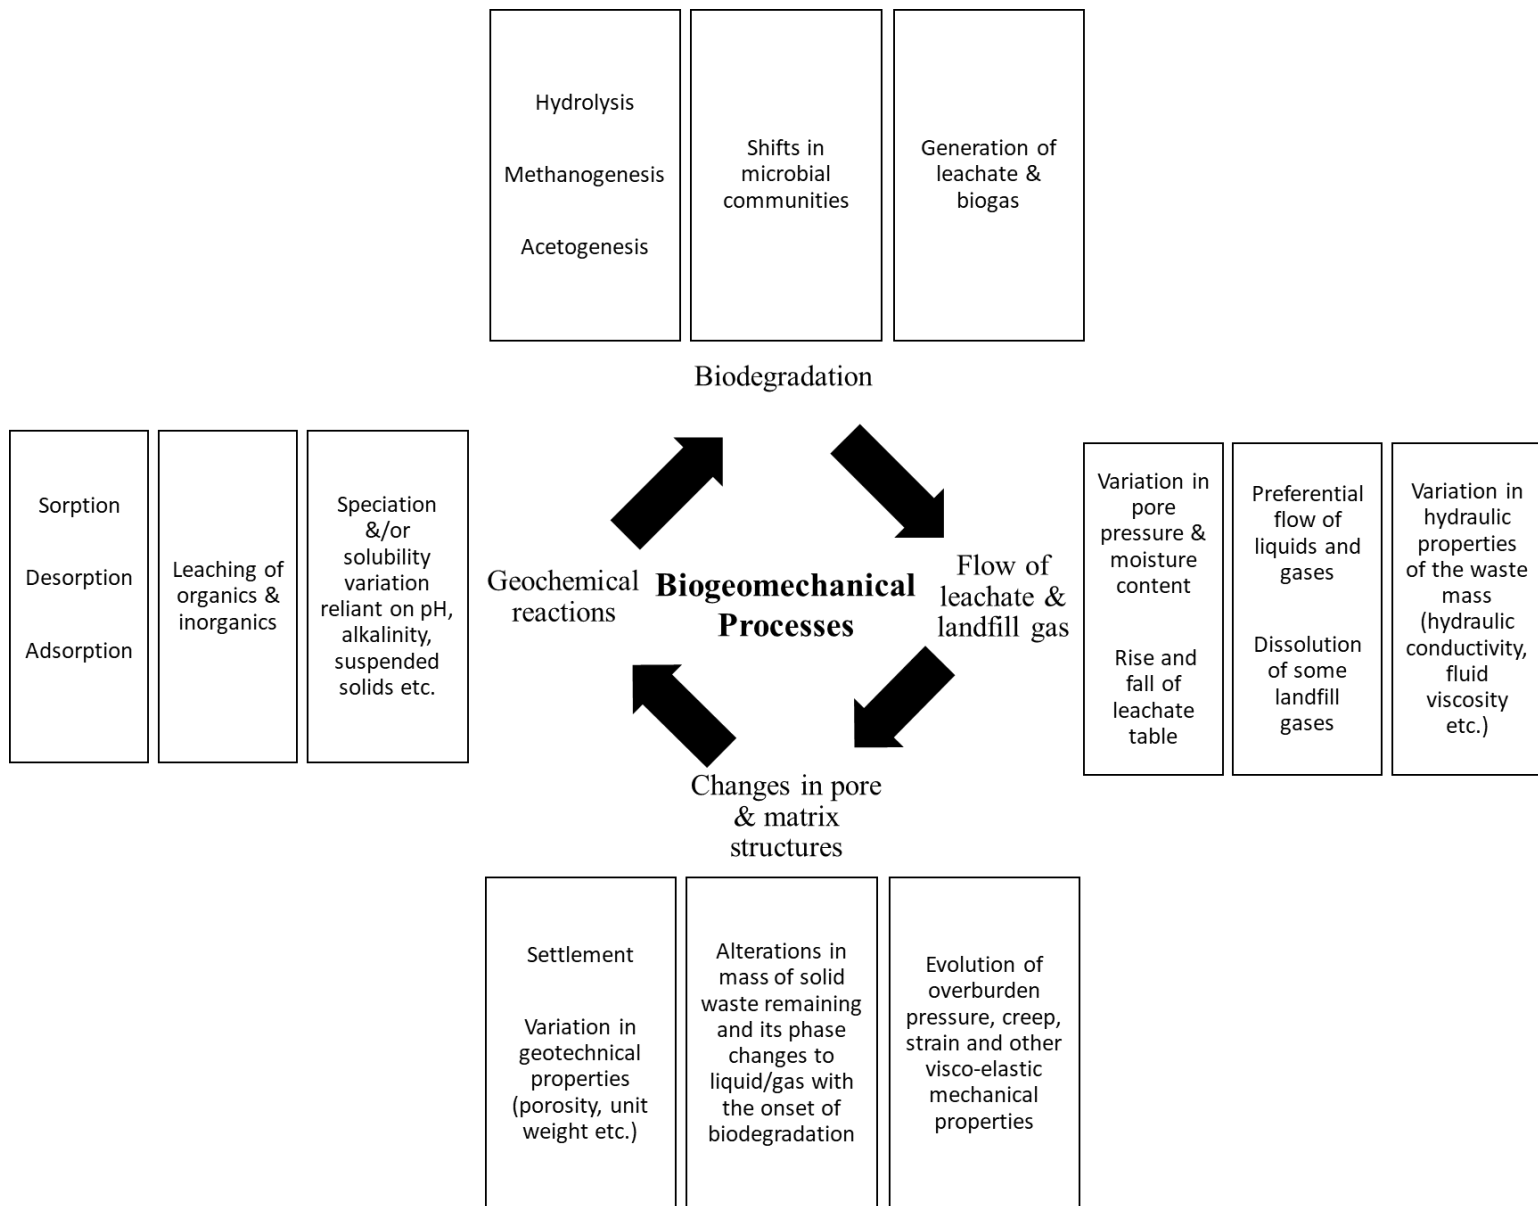


Figure 2. Different processes that take place in the MSW system. Conceptual model informed by the works of Datta et al., 2018, Fei et al., 2014a and McDougall, 2007.

694 **REFERENCES**

- 695 Abbaspour, K.C., (2005). Calibration of Hydrologic Models: When is a Model Calibrated?,
696 MODSIM 2005: International Congress On Modelling And Simulation: Advances And
697 Applications For Management And Decision Making, pp. 2449-2455.
698 Abbaspour, K.C., Johnson, C.A., van Genuchten, M.T., (2004). Estimating uncertain flow and
699 transport parameters using a sequential uncertainty fitting procedure. *Vadose Zone Journal* 3,
700 1340-1352.
701 Abdelhay, A., Albsoul, A., Hadidi, F., Abuothman, A., (2016). Optimization and Modeling of
702 Biogas Production From Green Waste/Biowaste Co-Digestion Using Leachate and Sludge.
703 *CLEAN - Soil, Air, Water* 44, 1557-1563.
704 Ahmed, S., Khanbilvardi, R., Fillos, J., Gleason, P., (1992). Two-Dimensional Leachate
705 Estimation through Landfills. *Journal of Hydraulic Engineering* 118 306-322.
706 Al-Gharbi, M.S., Blunt, M.J., (2005). Dynamic network modeling of two-phase drainage in
707 porous media. *Phys Rev E Stat Nonlin Soft Matter Phys* 71, 016308.
708 Al-Kharusi, A.S., Blunt, M.J., (2007). Network extraction from sandstone and carbonate pore
709 space images. *Journal of Petroleum Science and Engineering* 56.
710 Al-Khulaifi, Y., Lin, Q., Blunt, M.J., Bijeljic, B., (2017). Reaction Rates in Chemically
711 Heterogeneous Rock: Coupled Impact of Structure and Flow Properties Studied by X-ray
712 Microtomography. *Environ Sci Technol* 51, 4108-4116.
713 Al-Thani, A.A., Beaven, R.P., White, J.K., (2004). Modelling flow to leachate wells in landfills.
714 *Waste Manag* 24, 271-276.
715 Athanasopoulos, G.A., (2008). Chapter 7: Laboratory Testing of Municipal Solid Waste, in:
716 Zekkos, D. (Ed.), *Geotechnical Characterization, Field Measurement, and Laboratory Testing of*
717 *Municipal Solid Waste, International Symposium on Waste Mechanics 2008. American Society*
718 *of Civil Engineers*.
719 Audebert, M., Clement, R., Moreau, S., Duquennoi, C., Loisel, S., Touze-Foltz, N., (2016a).
720 Understanding leachate flow in municipal solid waste landfills by combining time-lapse ERT
721 and subsurface flow modelling - Part I: Analysis of infiltration shape on two different waste
722 deposit cells. *Waste Manag* 55, 165-175.
723 Audebert, M., Oxarango, L., Duquennoi, C., Touze-Foltz, N., Forquet, N., Clement, R., (2016b).
724 Understanding leachate flow in municipal solid waste landfills by combining time-lapse ERT
725 and subsurface flow modelling - Part II: Constraint methodology of hydrodynamic models.
726 *Waste Manag* 55, 176-190.
727 Barlaz, M.A., Ham, R.K., Schaefer, D.M., (1990). Methane Production from Municipal Refuse -
728 A Review of Enhancement Techniques and Microbial Dynamics. *Critical Reviews in*
729 *Environmental Control* 19, 557-584.
730 Barlaz, M.A., Reinhart, D., (2004). Bioreactor landfills: progress continues. *Waste Manag* 24,
731 859-860.
732 Bear, J., (1972). *Dynamics of Fluids in Porous Media*. . Dover Publications, Inc., New York.
733 Beaven, R.P., (2008). Review of responses to a landfill modelling challenge. *Proceedings of the*
734 *Institution of Civil Engineers - Waste and Resource Management* 161, 155-166.
735 Beaven, R.P., Ivanova, L.K., Richards, D.J., (2008). Setting a challenge to landfill modellers.
736 *Proceedings of the Institution of Civil Engineers - Waste and Resource Management* 161, 91-98.

737 Beaven, R.P., Powrie, W., Zardava, K., (2011). Hydraulic Properties of MSW, in: Zekkos, D.
 738 (Ed.), International Symposium on Waste Mechanics 2008. ASCE, New Orleans, Louisiana,
 739 United States.
 740 Bendz, D., Singh, V.P., (1999). Solute transport under steady and transient conditions in
 741 biodegraded municipal solid waste. *Water Resources Research* 35, 2333-2345.
 742 Bendz, D., Singh, V.P., Rosqvist, H., Bengtsson, L., (1998). Kinematic wave model for water
 743 movement in municipal solid waste. *Water Resources Research* 34, 2963-2970.
 744 Bengtsson, L., Bendz, D., Hogland, W., Rosqvist, H., Åkesson, M., (1994). Water balance for
 745 landfills of different age. *J Hydrol* 158, 203-217.
 746 Beven, K., Germann, P., (1981). Water flow in soil macropores – a combined flow model. .
 747 *Journal of Soil Science* 32, 15–29.
 748 Bijeljic, B., Mostaghimi, P., Blunt, M.J., (2011). Signature of non-Fickian solute transport in
 749 complex heterogeneous porous media. *Phys Rev Lett* 107, 204502.
 750 Bijeljic, B., Raeini, A., Mostaghimi, P., Blunt, M.J., (2013). Predictions of non-Fickian solute
 751 transport in different classes of porous media using direct simulation on pore-scale images. *Phys*
 752 *Rev E Stat Nonlin Soft Matter Phys* 87, 013011.
 753 Bird, M.B., Butler, S.L., Hawkes, C.D., Kotzer, T., (2014). Numerical modeling of fluid and
 754 electrical currents through geometries based on synchrotron X-ray tomographic images of
 755 reservoir rocks using Avizo and COMSOL. *Computers & Geosciences* 73, 6-16.
 756 Bird, N., Díaz, M.C., Saa, A., Tarquis, A.M., (2006). Fractal and multifractal analysis of pore-
 757 scale images of soil. *J Hydrol* 322, 211-219.
 758 Bird, N.R.A., Perrier, E., Rieu, M., (2000). The water retention function for a model of soil
 759 structure with pore and solid fractal distributions. *European Journal of Soil Science* 51, 55-63.
 760 Bleiker, D.E., Farquhar, G., McBean, E., (1995). Landfill settlement and the impact on site
 761 capacity and refuse hydraulic conductivity. *Waste Manage Res* 13, 533-554.
 762 Blunt, M.J., (2001). Flow in porous media pore-network models and multiphase flow. *Current*
 763 *Opinion in Colloid & Interface Science* 6, 197-207.
 764 Blunt, M.J., (2017). *Multiphase Flow in Permeable Media: A Pore-Scale Perspective*. Cambridge
 765 University Press.
 766 Blunt, M.J., Bijeljic, B., Dong, H., Gharbi, O., Iglauer, S., Mostaghimi, P., Paluszny, A.,
 767 Pentland, C., (2013). Pore-scale imaging and modelling. *Advances in Water Resources* 51, 197-
 768 216.
 769 Bolyard, S.C., (2016). Application of Landfill Treatment Approaches for the Stabilization of
 770 Municipal Solid Waste, Department of Civil, Environmental, and Construction Engineering in
 771 the College of Engineering and Computer Science. University of Central Florida, Orlando,
 772 Florida.
 773 Bolyard, S.C., Reinhart, D.R., (2016). Application of landfill treatment approaches for
 774 stabilization of municipal solid waste. *Waste Manag* 55, 22-30.
 775 Boon, M., (2017). The Impact of Rock Heterogeneity on Solute Spreading and Mixing
 776 Department of Earth Science and Engineering Faculty of Engineering. Imperial College London.
 777 Brooks, R., Corey, A., (1964). Hydraulic properties of porous media. . Colorado State
 778 University, Fort Collins, CO, USA.
 779 Brun, A., Engesgaard, P., (2002). Modelling of transport and biogeochemical processes in
 780 pollution plumes: literature review and model development. *J Hydrol* 256, 211-227.

781 Caicedo-Concha, D., (2016). An experimental study on the impact of two dimensional materials
782 in waste disposal sites: What are the implications for engineered landfills? *Sustain. Environ. Res*
783 26, 255-261.

784 Caicedo-Concha, D., Watson, G.V.R., Richards, D.J., Powrie, W., (2011). Exploring the use of
785 Micro-focus Computed Tomography for a better conceptual understanding of structure in
786 landfilled waste in the context of post-closure management for landfills. *Sustainable*
787 *Environmental Research*, 21, 1-10.

788 Caicedo, D.M., (2013). A study of the structure in solid wastes and some implications for fluid
789 flow in landfills, Faculty of Engineering and the Environment, School of Civil Engineering and
790 the Environment. University of Southampton.

791 Caplan, J.S., Gimenez, D., Subroy, V., Heck, R.J., Prior, S.A., Runion, G.B., Torbert, H.A.,
792 (2017). Nitrogen-mediated effects of elevated CO₂ on intra-aggregate soil pore structure. *Glob*
793 *Chang Biol* 23, 1585-1597.

794 Carrel, M., Beltran, M.A., Morales, V.L., Derlon, N., Morgenroth, E., Kaufmann, R., Holzner,
795 M., (2017). Biofilm imaging in porous media by laboratory X-Ray tomography: Combining a
796 non-destructive contrast agent with propagation-based phase-contrast imaging tools. *PLoS One*
797 12, e0180374.

798 Chen, T.H., Chynoweth, D.P., (1995). Hydraulic Conductivity of Compacted Municipal Solid-
799 Waste. *Bioresour. Technol.* 51, 205-212.

800 Clewes, H., Fuggles, E., Davies, S., Gregory, R.G., (2008). Modelling the landfill process using
801 GasSim2. *Proceedings of the Institution of Civil Engineers - Waste and Resource Management*
802 161, 105-111.

803 Datta, S., Zekkos, D., Fei, X., McDougall, J., (2017). Experimental Assessment and Modelling
804 of Coupled Biochemical Physical-Mechanical Biodegradation Process of a Municipal Solid
805 Waste Sample from Michigan, 2nd Symposium on Coupled Phenomena in Environmental
806 Geotechnics (CPEG2), Leeds, UK 2017, Leeds, UK.

807 Datta, S., et al. (2018). " Waste Composition-Dependent "HBM" Model Parameters Based on
808 Degradation Experiments " *Environmental Geotechnics* 0(0:0): 1-38.

809 Davit, Y., Byrne, H., Osborne, J., Pitt-Francis, J., Gavaghan, D., Quintard, M., (2013).
810 Hydrodynamic dispersion within porous biofilms. *Phys Rev E Stat Nonlin Soft Matter Phys* 87,
811 012718.

812 Davit, Y., Iltis, G., Debenest, G., Veran-Tissoires, S., Wildenschild, D., Gerino, M., Quintard,
813 M., (2011). Imaging biofilm in porous media using X-ray computed microtomography. *J*
814 *Microsc* 242, 15-25.

815 de Vries, E.T., Raoof, A., van Genuchten, M.T., (2017). Multiscale modelling of dual-porosity
816 porous media; a computational pore-scale study for flow and solute transport. *Advances in Water*
817 *Resources* 105, 82-95.

818 Deeley, G.M., Skierkowski, P., Robertson, J.M., (1985). Biodegradation of [14C]phenol in
819 secondary sewage and landfill leachate measured by double-vial radiorespirometry. *Appl*
820 *Environ Microbiol* 49, 867-869.

821 Dekking, M., Lévy-Véhel, J., Lutton, E., Tricot, C., (1999). *Fractals: Theory and Applications in*
822 *Engineering*. Springer.

823 Demetracopoulos, A.C., Korfiatis, G.P., Bourodimos, E.L., Nawy, E.G., (1986a). Unsaturated
824 Flow through Solid-Waste Landfills - Model and Sensitivity Analysis. *Water Resources Bulletin*
825 22, 601-609.

Demetracopoulos, A.C., Sehayek, L., Erdogan, H., (1986b). Modeling Leachate Production from Municipal Landfills. *J Environ Eng-Asce* 112, 849-866.

Di Bella, G., Di Trapani, D., Mannina, G., Viviani, G., (2012). Modeling of perched leachate zone formation in municipal solid waste landfills. *Waste Manag* 32, 456-462.

Di Bella, G., Mannina, G., Nicosia, S., Viviani, G., (2015). Influence of the Height of Municipal Solid Waste Landfill on the Formation of Perched Leachate Zones. *Journal of environmental engineering* 141.

Dixon, N., Langer, U., (2006). Development of a MSW classification system for the evaluation of mechanical properties. *Waste Manag* 26, 220-232.

Dixon, N., Langer, U., Gotteland, P., (2008a). Classification and Mechanical Behavior Relationships for Municipal Solid Waste: Study Using Synthetic Wastes. *J Geotech Geoenviron* 134, 79-90.

Dixon, N., Langer, U., Reddy, K.R., Maugeri, M., (2011). Waste Characterization, in: Zekkos, D. (Ed.), *International Symposium on Waste Mechanics 2008*. ASCE, New Orleans, Louisiana, United States.

Dixon, N., Langer, U., Reddy, K.R., Maugeri, M., Tinjum, J., Mahler, C., Cho, Y., (2008b). Chapter 5: Waste Characterization, in: Zekkos, D. (Ed.), *Geotechnical Characterization, Field Measurement, and Laboratory Testing of Municipal Solid Waste*, *International Symposium on Waste Mechanics 2008*. American Society of Civil Engineers.

El-Fadel, M., (1999). Leachate Recirculation Effects on Settlement and Biodegradation Rates in MSW Landfills. *Environmental Technology* 20, 121-133.

El-Fadel, M., Findikakis, A.N., Leckie, J.O., (1996). Numerical modelling of generation and transport of gas and heat in sanitary landfills II. Model application. *Waste management and research* 14.

El-Fadel, M., Findikakis, A.N., Leckie, J.O., (1997). Modeling Leachate Generation and Transport in Solid Waste Landfills. *Environmental Technology* 18, 669-686.

El-Fadel, M.F., A.N.; Leckie, J.O., (1996). Numerical modelling of generation and transport of gas and heat in landfills I. Model formulation. *Waste Manage Res* 14, 483-504.

Fei, X., (2016). Experimental Assessment of Coupled Physical - Biochemical - Mechanical - Hydraulic Processes of Municipal Solid Waste Undergoing Biodegradation. , Department of Civil & Environmental Engineering. University of Michigan, Michigan, U.S.

Fei, X., Zekkos, D., (2012). Settlement Due to Anaerobic Biodegradation from Laboratory Landfill Simulators, *GeoCongress 2012*. ASCE, Oakland, California, United States.

Fei, X., Zekkos, D., (2013). Factors Influencing Long-Term Settlement of Municipal Solid Waste in Laboratory Bioreactor Landfill Simulators. *Journal of Hazardous, Toxic, and Radioactive Waste* 17, 259-271.

Fei, X., Zekkos, D., (2016). The Influence of Waste Composition on the Physico-Biochemical-Hydraulic Characteristics of the Degradation Process of Municipal Solid Waste, *Geo-Chicago 2016*. ASCE, Chicago, Illinois.

Fei, X., Zekkos, D., Raskin, L., (2013). A laboratory landfill simulator for physical, geotechnical, chemical and microbial characterization of solid waste biodegradation processes, *Coupled Phenomena in Environmental Geotechnics*. Taylor & Francis Group, London, UK, pp. 321-327.

Fei, X., Zekkos, D., Raskin, L., (2014a). An Experimental Setup for Simultaneous Physical, Geotechnical, and Biochemical Characterization of Municipal Solid Waste Undergoing Biodegradation in the Laboratory. *Geotechnical Testing Journal* 37, 20130084.

872 Fei, X.C., Zekkos, D., Raskin, L., (2014b). Impact of Composition of Municipal Solid Waste on
873 Methane Generation in Laboratory Batch and Simulator Tests, Geoenvironmental Engineering,
874 Geo-Shanghai 2014. ASCE, Shanghai.

875 Fei, X.C., Zekkos, D., Raskin, L., (2015). Archaeal community structure in leachate and solid
876 waste is correlated to methane generation and volume reduction during biodegradation of
877 municipal solid waste. *Waste Management* 36, 184-190.

878 Fei, X.C., Zekkos, D., Raskin, L., (2016). Quantification of parameters influencing methane
879 generation due to biodegradation of municipal solid waste in landfills and laboratory
880 experiments. *Waste Management* 55, 276-287.

881 Fellner, J., Brunner, P.H., (2010). Modeling of leachate generation from MSW landfills by a 2-
882 dimensional 2-domain approach. *Waste Manag* 30, 2084-2095.

883 Feng, S., Zhang, X., (2013). Leachate recirculation using horizontal trenches considering the
884 effect of MSW settlement, *Coupled Phenomena in Environmental Geotechnics*, pp. 329-333.

885 Feng, S.J., Cao, B.Y., Li, A.Z., Chen, H.X., Zheng, Q.T., (2018). CFD modeling of hydro-
886 biochemical behavior of MSW subjected to leachate recirculation. *Environ Sci Pollut Res Int* 25,
887 5631-5642.

888 Feng, S.J., Cao, B.Y., Xie, H.J., (2017). Modeling of leachate recirculation using combined
889 drainage blanket-horizontal trench systems in bioreactor landfills. *Waste Manage Res* 35, 1072-
890 1083.

891 Feng, S.J., Cao, B.Y., Zhang, X., Xie, H.J., (2015). Modeling of leachate recirculation using
892 vertical wells in bioreactor landfills. *Environ Sci Pollut Res Int* 22, 9067-9079.

893 Feng, S.J., Zheng, Q.T., (2014). Gas migration in bioreactor landfills considering msw
894 compression and leachate recirculation, *Engineers Australia*, Australia.

895 Feng, S.J., Zheng, Q.T., Xie, H.J., (2016). Axisymmetric gas flow model for bioreactor landfills
896 incorporating MSW compression and leachate recirculation. *Environmental Earth Sciences* 75.

897 Garcia de Cortazar, A.L., Tejero Monzon, I., 2007. Application of simulation models to the
898 diagnosis of MSW landfills: an example. *Waste Manag* 27, 691-703.

899 Garciadecortazar, A., Monzon, I., (2007). MODUELO 2: A new version of an integrated
900 simulation model for municipal solid waste landfills. *Environmental Modelling & Software* 22,
901 59-72.

902 Ghane, E., Fausey, N., Brown, L., (2014). Non-darcy flow of water through woodchip media. *J*
903 *Hydrol* 519, 3400-3409.

904 Ghane, E., Feyereisen, G.W., Rosen, C.J., (2016). Non-linear hydraulic properties of woodchips
905 necessary to design denitrification beds. *J Hydrol* 542, 463-473.

906 Gibson, J.R., Lin, H., Bruns, M.A., (2006). A comparison of fractal analytical methods on 2- and
907 3-dimensional computed tomographic scans of soil aggregates. *Geoderma* 134, 335-348.

908 GolderAssociates, (2012). GasSim simulates the fate of landfill gas arising from managed or
909 unmanaged landfill sites. .

910 Gotze, R., Boldrin, A., Scheutz, C., Astrup, T.F., (2016). Physico-chemical characterisation of
911 material fractions in household waste: Overview of data in literature. *Waste Manag* 49, 3-14.

912 Graveleau, M., Soulaire, C., Tchelepi, H.A., (2017). Pore-Scale Simulation of Interphase
913 Multicomponent Mass Transfer for Subsurface Flow. *Transport Porous Med*.

914 Grellier, S.R., K.R.; Gangathulasi, J.; Abid, R.; Peters, C., (2007). US MSW and Its
915 Biodegradation in a Bioreactor Landfill. *Proceedings Sardinia 2007, Eleventh International*
916 *Waste Management and Landfill Symposium*.

917 Guibert, R., Horgue, P., Debenest, G., Quintard, M., (2016). A Comparison of Various Methods
 918 for the Numerical Evaluation of Porous Media Permeability Tensors from Pore-Scale Geometry.
 919 Mathematical Geosciences 48, 329-347.
 920 Han, B., Scicchitano, V., Imhoff, P.T., (2011). Measuring fluid flow properties of waste and
 921 assessing alternative conceptual models of pore structure. Waste Manag 31, 445-456.
 922 Ke, H., Hu, J., Xu, X.B., Wu, X.W., Li, Y.C., Lan., J.W., (2018). "Analytical solution of leachate
 923 flow to vertical wells in municipal solid waste landfills using a dual-porosity model."
 924 Engineering Geology 239: 27-40.
 925 Haydar, M.M., Khire, M.V., (2005). Leachate recirculation using horizontal trenches in
 926 bioreactor landfills. J Geotech Geoenviron 131, 837-847.
 927 Haydar, M.M., Khire, M.V., (2007). Leachate Recirculation Using Permeable Blankets in
 928 Engineered Landfills. J Geotech Geoenviron 133, 360-371.
 929 Helmig, R., (1997). Multiphase Flow and Transport Processes in the Subsurface: A Contribution
 930 to the Modeling of Hydrosystems. . Springer (Environmental Engineering), Berlin, Heidelberg.
 931 Hettiaratchi, J.P., Jayasinghe, P.A., Bartholameuz, E.M., Kumar, S., (2014). Waste degradation
 932 and gas production with enzymatic enhancement in anaerobic and aerobic landfill bioreactors.
 933 Bioresour Technol 159, 433-436.
 934 Hettiaratchi, P., Jayasinghe, P., Tay, J.H., Yadav, S., (2015). Recent Advances of Biomass Waste
 935 to Gas Using Landfill Bioreactor Technology - A Review. Current Organic Chemistry 19, 413-
 936 422.
 937 Hoornweg, D., Bhada-tata, P., (2012). What a waste: A global review of solid waste
 938 management, The World Bank - Urban Development Series Knowledge Papers. Urban
 939 Development & Local Government Unit, World Bank. , Washington, DC, USA.
 940 Hoornweg, D., Bhada-Tata, P., Kennedy, C., (2013). Waste production must peak this century.
 941 Nature 502, 615-617.
 942 Hopmans, J.W., Simunek, J., Romano, N., Durneri, W., (2002). Simultaneous determination of
 943 water transmission and retention properties: Inverse methods, in Methods of Soil Analysis, ,
 944 Methods of Soil Analysis, Part 4, Physical Methods. Soil Sci. Soc. Am. J., pp. 963-1008.
 945 Hossain, M.S., (2002). Mechanics of compressibility and strength of solid waste in bioreactor
 946 landfills., Department of Civil Engineering. North Carolina State University.
 947 Hutchinson, J.E., 1981. Fractals and Self Similarity. Indiana University Mathematics Journal 30,
 948 713-747.
 949 Islam, J., Singhal, N., O'Sullivan, M., (2001). Modeling biogeochemical processes in leachate-
 950 contaminated soils: A review. Transport Porous Med 43, 407-440.
 951 Ivanova, L.K., Richards, D.J., Smallman, D.J., (2008). Assessment of the anaerobic
 952 biodegradation potential of MSW. Proceedings of the Institution of Civil Engineers - Waste and
 953 Resource Management 161, 167-180.
 954 Jaya, V., Raghukanth, S.T.G., Sonika Mohan, S., (2013). Estimating fractal dimension of
 955 lineaments using box counting method for the Indian landmass. Geocarto International 29, 314-
 956 331.
 957 Jayasinghe, P.A., (2013). Enhancing Gas Production in Landfill Bioreactors by Leachate
 958 Augmentation., Department Of Chemical And Petroleum Engineering. University of Calgary.
 959 Jayasinghe, P.A., Hettiaratchi, J.P., Mehrotra, A.K., Kumar, S., (2011). Effect of enzyme
 960 additions on methane production and lignin degradation of landfilled sample of municipal solid
 961 waste. Bioresour Technol 102, 4633-4637.

962 Jayasinghe, P.A., Hettiaratchi, J.P., Mehrotra, A.K., Kumar, S., (2014). Reaction mechanisms
 963 and rate constants of waste degradation in landfill bioreactor systems with enzymatic-
 964 enhancement. *Bioresour Technol* 162, 279-282.
 965 Jayasinghe, P.A., Hettiaratchi, J.P.A., Mehrotra, A.K., Steele, M.A., (2013). Enhancing Gas
 966 Production in Landfill Bioreactors: Flow-Through Column Study on Leachate Augmentation
 967 with Enzyme. *Journal of Hazardous, Toxic, and Radioactive Waste* 17, 253-258.
 968 Kazimoglu, Y.K., McDougall, J.R., Pyrah, I.C., (2006). Unsaturated Hydraulic Conductivity of
 969 Landfilled Waste, in: Miller, G.A.Z., C.E.; Houston, S.L.; et al. (Ed.), *Unsaturated Soils 2006*.
 970 *Proceedings of the Fourth International Conference on Unsaturated Soils*. ASCE, Carefree,
 971 Arizona.
 972 Khanbilvardi, R.M., Ahmed, S., Gleason, P.J., (1995). Flow Investigation for Landfill Leachate
 973 (Fill). *J Environ Eng-Asce* 121, 45-57.
 974 Khire, M.V., Kaushik, T., (2012). Experimental and Numerical Evaluation of Liquid Injection
 975 using Horizontal Trench System for Bioreactor Landfills, *GeoCongress*. ASCE.
 976 Khire, M.V., Mukherjee, M., (2007). Leachate injection using vertical wells in bioreactor
 977 landfills. *Waste Manag* 27, 1233-1247.
 978 Khire, M.V., Saravanathiiban, D.S., (2010). Centrifuge Testing of Unsaturated Hydraulic
 979 Properties of Municipal Solid Waste, *GeoCongress 2012*.
 980 Kindlein, J., Dinkler, D., Ahrens, H., (2006). Numerical modelling of multiphase flow and
 981 transport processes in landfills. *Waste Manage Res* 24, 376-387.
 982 Kjeldsen, P., Barlaz, M.A., Rooker, A.P., Baun, A., Ledin, A., Christensen, T.H., (2002). Present
 983 and Long-Term Composition of MSW Landfill Leachate: A Review. *Critical Reviews in*
 984 *Environmental Science and Technology* 32, 297-336.
 985 Kjeldsen, P., Beaven, R.P., (2011). Landfilling: Hydrology, in: Christensen, T.H. (Ed.), *Solid*
 986 *Waste Technology & Management*. Blackwell Publishing Ltd., pp. 709-734.
 987 Koganti, K., (2015). Characterisation and Comparison of Fresh Landfilled Solid Waste.
 988 University of Texas at Arlington, Texas, U.S.A.
 989 Kohne, J.M., Kohne, S., Simunek, J., (2009). A review of model applications for structured soils:
 990 a) Water flow and tracer transport. *J Contam Hydrol* 104, 4-35.
 991 Korfiatis, G.P., Demetracopoulos, A.C., Bourodimos, E.L., Nawy, E.G., (1984). Moisture
 992 Transport in a Solid-Waste Column. *J Environ Eng-Asce* 110, 780-796.
 993 Krause, M.J., Chickering, G.W., Townsend, T.G., Pullammanappallil, P., (2017). Effects of
 994 temperature and particle size on the biochemical methane potential of municipal solid waste
 995 components. *Waste Manag*.
 996 Krause, M.J., W. Chickering, G., Townsend, T.G., Reinhart, D.R., (2016). Critical review of the
 997 methane generation potential of municipal solid waste. *Critical Reviews in Environmental*
 998 *Science and Technology* 46, 1117-1182.
 999 Larachi, F., Hannaoui, R., Horgue, P., Augier, F., Haroun, Y., Youssef, S., Rosenberg, E., Prat,
 1000 M., Quintard, M., (2014). X-ray micro-tomography and pore network modeling of single-phase
 1001 fixed-bed reactors. *Chemical Engineering Journal* 240, 290-306.
 1002 Larue, A.E., Swider, P., Duru, P., Daviaud, D., Quintard, M., Davit, Y., (2018). Quantitative 3D
 1003 comparison of biofilm imaged by X-ray micro-tomography and two-photon laser scanning
 1004 microscopy. *J Microsc*.
 1005 Lee, K.-K., Suk, H., Choi, S.-i., Lee, C.H., Chung, S.-Y., (2001). Numerical evaluation of
 1006 landfill stabilization by leachate recirculation. *Journal of Environmental Engineering* 127.

1007 Liu, K., Ostadhassan, M., (2017). Multi-scale fractal analysis of pores in shale rocks. *Journal of*
 1008 *Applied Geophysics* 140, 1-10.
 1009 Liu, M., Shabaninejad, M., Mostaghimi, P., (2017). Impact of mineralogical heterogeneity on
 1010 reactive transport modelling. *Computers & Geosciences* 104, 12-19.
 1011 Lobo, A., López, A., Cobo, N., Tejero, I., (2008). Simulation of municipal solid waste reactors
 1012 using Moduelo. *Proceedings of the Institution of Civil Engineers - Waste and Resource*
 1013 *Management* 161, 99-104.
 1014 Lopes, R., Betrouni, N., (2009). Fractal and multifractal analysis: a review. *Med Image Anal* 13,
 1015 634-649.
 1016 Mandelbrot, B., (1982). *The Fractal Geometry of Nature*. W. H. Freeman and Co.
 1017 Matasovic, N., El-Sherbiny, R., Kavazanjian, E., 2008. Chapter 6: In-Situ Measurements of
 1018 MSW Properties, in: Zekkos, D. (Ed.), *Geotechnical Characterization, Field Measurement, and*
 1019 *Laboratory Testing of Municipal Solid Waste*, International Symposium on Waste Mechanics
 1020 2008. American Society of Civil Engineers.
 1021 McCreanor, P.T., Reinhart, D.R., (1999). Hydrodynamic modeling of leachate recirculating
 1022 landfills. *Waste Manage Res* 17, 465-469.
 1023 McCreanor, P.T., Reinhart, D.R., (2000). Mathematical modeling of leachate routing in a
 1024 leachate recirculating landfill. *Water Res.* 34, 1285-1295.
 1025 McDougall, J., (2007). A hydro-bio-mechanical model for settlement and other behaviour in
 1026 landfilled waste. *Computers and Geotechnics* 34, 229-246.
 1027 McDougall, J., (2008). Landfill modelling challenge: HBM model predictions. *Proceedings of*
 1028 *the Institution of Civil Engineers - Waste and Resource Management* 161, 147-153.
 1029 McDougall, J.R., (2011). Settlement-The Short and the Long of it, in: Zekkos, D. (Ed.),
 1030 *International Symposium on Waste Mechanics 2008*. ASCE, New Orleans, Louisiana, United
 1031 States.
 1032 Menke, H.P., Andrew, M.G., Blunt, M.J., Bijeljic, B., (2016). Reservoir condition imaging of
 1033 reactive transport in heterogeneous carbonates using fast synchrotron tomography — Effect of
 1034 initial pore structure and flow conditions. *Chemical Geology* 428, 15-26.
 1035 Menke, H.P., Bijeljic, B., Blunt, M.J., (2017). Dynamic reservoir-condition microtomography of
 1036 reactive transport in complex carbonates: Effect of initial pore structure and initial brine pH.
 1037 *Geochimica et Cosmochimica Acta* 204, 267-285.
 1038 Morató, M.C., Castellanos, M.T., Bird, N.R., Tarquis, A.M., (2017). Multifractal analysis in soil
 1039 properties: Spatial signal versus mass distribution. *Geoderma* 287, 54-65.
 1040 Mostaghimi, P., (2012). *Transport Phenomena Modelled on Pore-Space Images*, Department of
 1041 *Earth Science and Engineering*. Imperial College London, London, U.K.
 1042 Mostaghimi, P., Bijeljic, B., Blunt, M.J., (2010). Simulation of Flow and Dispersion on Pore-
 1043 Space Images, SPE Annual Technical Conference and Exhibition, Florence, Italy.
 1044 Mostaghimi, P., Blunt, M.J., Bijeljic, B., (2012). Computations of Absolute Permeability on
 1045 Micro-CT Images. *Mathematical Geosciences* 45, 103-125.
 1046 Mostaghimi, P., Liu, M., Arns, C.H., (2016). Numerical Simulation of Reactive Transport on
 1047 Micro-CT Images. *Mathematical Geosciences* 48, 963-983.
 1048 Muaaz-Us-Salam, S., Cleall, P.J., Harbottle, M.J., (2017). Enhanced Delignification and
 1049 Methane Generation in Waste Repositories - Overcoming Heterogeneity, 16th International
 1050 *Waste Management and Landfill Symposium*. CISA, Sardinia, Italy.

1051 Muljadi, B.P., Blunt, M.J., Raeini, A.Q., Bijeljic, B., (2016). The impact of porous media
 1052 heterogeneity on non-Darcy flow behaviour from pore-scale simulation. *Advances in Water*
 1053 *Resources* 95, 329-340.
 1054 Noble, J.J., Arnold, A.E., (1991). Experimental and Mathematical Modeling of Moisture
 1055 Transport in Landfills. *Chemical Engineering Communications* 100, 95-111.
 1056 Olaosun, O.O., (2001). Modeling Leachate Production in Heterogeneous Municipal Solid Waste
 1057 Landfills, Department of Chemical and Petroleum Engineering. University of Calgary.
 1058 Olivier, F., Oxarango, L., Mugnier, V., Tinetti, A.J., Marcoux, M.A., (2009). Estimating the
 1059 drawdown of leachate in a saturated landfill: 3D modelling based on field pumping tests.,
 1060 *Proceeding of Sardinia 2009, International Waste Management and Landfill Symposium*, S.
 1061 Margherita di Pula, Italy.
 1062 Oman, C., Rosqvist, H., (1999). Transport fate of organic compounds with water through
 1063 landfills. *Water Res.* 33, 2247-2254.
 1064 Pereira Nunes, J.P., Bijeljic, B., Blunt, M.J., (2015). Time-of-Flight Distributions and
 1065 Breakthrough Curves in Heterogeneous Porous Media Using a Pore-Scale Streamline Tracing
 1066 Algorithm. *Transport Porous Med* 109, 317-336.
 1067 Pereira Nunes, J.P., Bijeljic, B., Blunt, M.J., (2016). Pore-space structure and average dissolution
 1068 rates: A simulation study. *Water Resources Research* 52, 7198-7212.
 1069 Piller, M., Casagrande, D., Schena, G., Santini, M., (2014). Pore-scale simulation of laminar
 1070 flow through porous media. *Journal of Physics: Conference Series* 501.
 1071 Pohland, F.G., (1980). Leachate Recycle as Landfill Management Option. *Journal of the*
 1072 *Environmental Engineering Division-Asce* 106, 1057-1069.
 1073 Powrie, W., Beaven, R.P., (1999). Hydraulic properties of household waste and implications for
 1074 landfills. *P I Civil Eng-Geotec* 137, 235-247.
 1075 Quintard, M., (2015). Transfers in Porous Media. *Special Topics and Reviews in Porous Media:*
 1076 *An International Journal* 6.
 1077 Raeini, A.Q., Bijeljic, B., Blunt, M.J., (2013). Numerical Modelling of Sub-pore Scale Events in
 1078 Two-Phase Flow Through Porous Media. *Transport Porous Med* 101, 191-213.
 1079 Raeini, A.Q., Blunt, M.J., Bijeljic, B., (2012). Modelling two-phase flow in porous media at the
 1080 pore scale using the volume-of-fluid method. *J Comput Phys* 231, 5653-5668.
 1081 Rashid, G.M., Duran-Pena, M.J., Rahmanpour, R., Sapsford, D., Bugg, T.D., (2017).
 1082 Delignification and Enhanced Gas Release from Soil Containing Lignocellulose by Treatment
 1083 with Bacterial Lignin Degradors. *J Appl Microbiol.*
 1084 Reddy, K.R., Hettiarachchi, H., Gangathulasi, J., Bogner, J.E., (2011). Geotechnical properties of
 1085 municipal solid waste at different phases of biodegradation. *Waste Manag* 31, 2275-2286.
 1086 Reddy, K.R., Hettiarachchi, H., Parakalla, N.S., Gangathulasi, J., Bogner, J.E., (2009).
 1087 Geotechnical properties of fresh municipal solid waste at Orchard Hills Landfill, USA. *Waste*
 1088 *Manag* 29, 952-959.
 1089 Reddy, K.R., Kulkarni, H.S., Khire, M.V., (2013). Two-Phase Modeling of Leachate
 1090 Recirculation Using Vertical Wells in Bioreactor Landfills. *Journal of Hazardous, Toxic, and*
 1091 *Radioactive Waste* 17, 272-284.
 1092 Reddy, K.R., Kumar, G., Giri, R.K., (2017a). Influence of dynamic coupled hydro-bio-
 1093 mechanical processes on response of municipal solid waste and liner system in bioreactor
 1094 landfills. *Waste Management* 63, 143-160.

1095 Reddy, K.R., Kumar, G., Giri, R.K., Basha, B.M., (2017b). Reliability assessment of bioreactor
 1096 landfills using Monte Carlo simulation and coupled hydro-bio-mechanical model. *Waste*
 1097 *Management*.
 1098 Reichel, T., Haarstrick, A., (2008). Modelling decomposition of MSW using genetic algorithms.
 1099 *Proceedings of the Institution of Civil Engineers - Waste and Resource Management* 161, 113-
 1100 120.
 1101 Reinhart, D., (1989). Fate of selected organic pollutants during landfill codisposal with
 1102 municipal refuse. . Georgia Institute of Technology, Atlanta, GA, USA.
 1103 Reinhart, D., (1995). The Impact of Leachate Recirculation on Municipal Solid Waste Landfill
 1104 Operating Characteristics.
 1105 Reinhart, D.R., (1996). Full-scale experiences with leachate recirculating landfills: Case studies.
 1106 *Waste Manage Res* 14, 347-365.
 1107 Reinhart, D.R., McCreanor, P.T., Townsend, T., (2002). The bioreactor landfill: its status and
 1108 future. *Waste Manag Res* 20, 172-186.
 1109 Remmas, N., Roukouni, C., Ntougias, S., (2017). Bacterial community structure and prevalence
 1110 of *Pseudomonas*-like bacteria in aged landfill leachate. *Environ Sci Pollut Res Int* 24, 6757-6769.
 1111 Roman, S., Soullaine, C., AlSaud, M.A., Kovscek, A., Tchelepi, H., (2016). Particle velocimetry
 1112 analysis of immiscible two-phase flow in micromodels. *Advances in Water Resources* 95, 199-
 1113 211.
 1114 Rosqvist, H., Bendz, D., (1999). An experimental evaluation of the solute transport volume in
 1115 biodegraded municipal solid waste. *Hydrology and Earth System Sciences* 3, 429-438.
 1116 Rosqvist, H., Destouni, G., (2000). Solute transport through preferential pathways in municipal
 1117 solid waste. *Journal of Contaminant Hydrology* 46, 39-60.
 1118 Rosqvist, N.H., Dollar, L.H., Fourie, A.B., (2005). Preferential flow in municipal solid waste and
 1119 implications for long-term leachate quality: valuation of laboratory-scale experiments. *Waste*
 1120 *Manage Res* 23, 367-380.
 1121 San José Martínez, F., Martín, M.A., Caniego, F.J., Tuller, M., Guber, A., Pachepsky, Y.,
 1122 García-Gutiérrez, C., (2010). Multifractal analysis of discretized X-ray CT images for the
 1123 characterization of soil macropore structures. *Geoderma* 156, 32-42.
 1124 Sanchez, R., Hashemi, M., Tsotsis, T.T., Sahimi, M., (2006). Computer simulation of gas
 1125 generation and transport in landfills II: Dynamic conditions. *Chemical Engineering Science* 61,
 1126 4750-4761.
 1127 Sanchez, R., Tsotsis, T.T., Sahimi, M., (2007). Computer Simulation of Gas Generation and
 1128 Transport in Landfills III: Development of Landfills' Optimal Mode. *Chemical Engineering*
 1129 *Science* 62, 6378-6390.
 1130 Sanchez, R., Tsotsis, T.T., Sahimi, M., (2010). Computer simulation of gas generation and
 1131 transport in landfills. IV Modeling of liquid-gas flow. *Chemical Engineering Science* 65, 1212-
 1132 1226.
 1133 Saquing, J.M., Knappe, D.R., Barlaz, M.A., (2012). Fate and transport of phenol in a packed bed
 1134 reactor containing simulated solid waste. *Waste Manag* 32, 327-334.
 1135 Schlüter, S., Sheppard, A., Brown, K., Wildenschild, D., (2014). Image processing of multiphase
 1136 images obtained via X-ray microtomography: A review. *Water Resources Research* 50, 3615-
 1137 3639.
 1138 Seetha, N., Raoof, A., Mohan Kumar, M.S., Majid Hassanizadeh, S., (2017). Upscaling of
 1139 nanoparticle transport in porous media under unfavorable conditions: Pore scale to Darcy scale. *J*
 1140 *Contam Hydrol* 200, 1-14.

1141 Simunek, J., Jarvis, N.J., van Genuchten, M.T., Gardenas, A., (2003). Review and comparison of
 1142 models for describing non-equilibrium and preferential flow and transport in the vadose zone. *J*
 1143 *Hydrol* 272, 14-35.
 1144 Simunek, J., van Genuchten, M.T., (2008). Modeling nonequilibrium flow and transport with
 1145 HYDRUS. *Vadose Zone Journal* 7, 782-797.
 1146 Šimůnek, J., van Genuchten, M.T., Šejna, M., (2011). The HYDRUS Software Package for
 1147 Simulating Two- and Three-Dimensional Movement of Water, Heat, and Multiple Solutes in
 1148 Variably-Saturated Media, Technical Manual, PC Progress, Prague, Czech Republic,.
 1149 Slimani, R., Oxarango, L., Sbartai, B., Tinet, A.J., Olivier, F., Dias, D., (2016). Leachate flow
 1150 around a well in MSW landfill: Analysis of field tests using Richards model. *Waste Manag.*
 1151 Soulaïne, C., Debenest, G., Quintard, M., (2011). Upscaling multi-component two-phase flow in
 1152 porous media with partitioning coefficient. *Chemical Engineering Science* 66, 6180-6192.
 1153 Soulaïne, C., Gjetvaj, F., Garing, C., Roman, S., Russian, A., Gouze, P., Tchelepi, H.A., (2016).
 1154 The Impact of Sub-Resolution Porosity of X-ray Microtomography Images on the Permeability.
 1155 *Transport Porous Med* 113, 227-243.
 1156 Staley, B., Barlaz, M., (2009). Composition of Municipal Solid Waste in the United States and
 1157 Implications for Carbon Sequestration and Methane Yield. *Journal of Environmental*
 1158 *Engineering* 135, 901-909.
 1159 Staley, B.F., (2009). Environmental and Spatial Factors Affecting Microbial Ecology and
 1160 Metabolic Activity during the Initiation of Methanogenesis in Solid Waste. North Carolina State
 1161 University, Raleigh, North Carolina.
 1162 Staley, B.F., de Los Reyes, F.L., 3rd, Barlaz, M.A., (2011). Effect of spatial differences in
 1163 microbial activity, pH, and substrate levels on methanogenesis initiation in refuse. *Appl Environ*
 1164 *Microbiol* 77, 2381-2391.
 1165 Staley, B.F., de los Reyes, F.L., 3rd, Barlaz, M.A., (2012). Comparison of Bacteria and Archaea
 1166 communities in municipal solid waste, individual refuse components, and leachate. *FEMS*
 1167 *Microbiol Ecol* 79, 465-473.
 1168 Staley, B.F., Xu, F., Cowie, S.J., Barlaz, M.A., Hater, G.R., (2006). Release of trace organic
 1169 compounds during the decomposition of municipal solid waste components. *Environ Sci Technol*
 1170 40, 5984-5991.
 1171 Statom, R.A., McCray, J.E., Thyne, G.D., (2006). Conceptual model for landfill hydrologic
 1172 transport developed using chloride tracer data and dual-domain modeling. *Environmental &*
 1173 *Engineering Geoscience* 12, 67-78.
 1174 Subroy, V., Gimenez, D., Qin, M., Krogmann, U., Strom, P.F., Miskewitz, R.J., (2014).
 1175 Hydraulic properties of coarsely and finely ground woodchips. *J Hydrol* 517, 201-212.
 1176 Suk, H., Lee, K.-K., Lee, C.H., (2000). Biologically Reactive Multispecies Transport in Sanitary
 1177 Landfill. *Journal of Environmental Engineering* 126, 419-427.
 1178 Sykes, J.F., Farquhar, G.J., (1983). Parameter determination for models of sanitary landfill
 1179 leachate organic migration and attenuation. *Papers of the American Chemical Society* 186, 110-
 1180 ENVR.
 1181 Sykes, J.F., Soyupak, S., Farquhar, G.J., (1982). Modellinf of leachate organic migration and
 1182 attenuation in groundwaters below sanitary landfills. *Water Resources Research* 18, 135-145.
 1183 Tinet, A.-J., Oxarango, L., Gourc, J.P., (2011a). Experimentak and Theoretical Aanalysis of
 1184 Leachate Flow in Landfills, *Geo-Environmental Engineering 2011*, Kagawa National College of
 1185 Technology, Takamatsu, Japan.

1186 Tinet, A.J., Oxarango, L., Bayard, R., Benbelkacem, H., Stoltz, G., Staub, M.J., Gourc, J.P.,
 1187 (2011b). Experimental and theoretical assessment of the multi-domain flow behaviour in a waste
 1188 body during leachate infiltration. *Waste Manag* 31, 1797-1806.
 1189 Ünlü, E.D.Y.K., Rowe, R.K., (2004). Modelling leachate quality and quantity in municipal solid
 1190 waste landfills. *Waste Manage Res* 22, 78-92.
 1191 USEPA, (2005). Landfill Gas Emissions Model (LandGEM) Version 3.02 User's Guide., EPA-
 1192 600/R-05/047. United States Environment Protection Agency, Washington, D.C.
 1193 van der Sloot, H.A., Kosson, D.S., van Zomeren, A., (2017). Leaching, geochemical modelling
 1194 and field verification of a municipal solid waste and a predominantly non-degradable waste
 1195 landfill. *Waste Manag* 63, 74-95.
 1196 van der Sloot, H.A., van Zomeren, A., Meeussen, J.C., Seignette, P., Bleijerveld, R., (2007). Test
 1197 method selection, validation against field data, and predictive modelling for impact evaluation of
 1198 stabilised waste disposal. *J Hazard Mater* 141, 354-369.
 1199 van Genuchten, M.T., (1980). A closed-form equation for predicting the hydraulic conductivity
 1200 of unsaturated soils. *Soil Science Society of America Journal* 44, 892-898.
 1201 Vereecken, H., Schnepf, A., Hopmans, J.W., Javaux, M., Or, D., Roose, T., Vanderborght, J.,
 1202 Young, M.H., Amelung, W., Aitkenhead, M., Allison, S.D., Assouline, S., Baveye, P., Berli, M.,
 1203 Brüggemann, N., Finke, P., Flury, M., Gaiser, T., Govers, G., Ghezzehei, T., Hallett, P.,
 1204 Hendricks Franssen, H.J., Heppell, J., Horn, R., Huisman, J.A., Jacques, D., Jonard, F., Kollet,
 1205 S., Lafolie, F., Lamorski, K., Leitner, D., McBratney, A., Minasny, B., Montzka, C., Nowak, W.,
 1206 Pachepsky, Y., Padarian, J., Romano, N., Roth, K., Rothfuss, Y., Rowe, E.C., Schwen, A.,
 1207 Šimůnek, J., Tiktak, A., Van Dam, J., van der Zee, S.E.A.T.M., Vogel, H.J., Vrugt, J.A.,
 1208 Wöhling, T., Young, I.M., (2016). Modeling Soil Processes: Review, Key Challenges, and New
 1209 Perspectives. *Vadose Zone Journal* 15, 0.
 1210 Voss, C.I., (1984). SUTRA: A finite-element simulation model for saturated-unsaturated fluid-
 1211 density-dependent ground-water flow with energy transport or chemically-reactive single-species
 1212 solute transport. U.S. Geol. Surv. Water Resour. Invest.
 1213 Wang, J., Guo, L., Bai, Z., Yang, L., (2016a). Using computed tomography (CT) images and
 1214 multi-fractal theory to quantify the pore distribution of reconstructed soils during ecological
 1215 restoration in opencast coal-mine. *Ecological Engineering* 92, 148-157.
 1216 Wang, P., Jiang, Z., Ji, W., Zhang, C., Yuan, Y., Chen, L., Yin, L., (2016b). Heterogeneity of
 1217 intergranular, intraparticle and organic pores in Longmaxi shale in Sichuan Basin, South China:
 1218 Evidence from SEM digital images and fractal and multifractal geometries. *Marine and*
 1219 *Petroleum Geology* 72, 122-138.
 1220 Wang, X., 2015. Biodegradability of Forest Products in Laboratory- and Field- Scale Municipal
 1221 Solid Waste (MSW) Landfills. North Carolina State University, Raleigh, North Carolina.
 1222 Wang, X., Barlaz, M.A., (2016). Decomposition and carbon storage of hardwood and softwood
 1223 branches in laboratory-scale landfills. *Sci Total Environ* 557-558, 355-362.
 1224 Wang, X., De la Cruz, F.B., Ximenes, F., Barlaz, M.A., (2015). Decomposition and carbon
 1225 storage of selected paper products in laboratory-scale landfills. *Sci Total Environ* 532, 70-79.
 1226 Wang, X., Padgett, J.M., De la Cruz, F.B., Barlaz, M.A., (2011). Wood biodegradation in
 1227 laboratory-scale landfills. *Environ Sci Technol* 45, 6864-6871.
 1228 Wang, X., Padgett, J.M., Powell, J.S., Barlaz, M.A., (2013). Decomposition of forest products
 1229 buried in landfills. *Waste Manag* 33, 2267-2276.

1230 Warwick, S.J., Durany-Fernandez, P., Sapsford, D.J., Cleall, P.J., Harbottle, M.J., (2018).
 1231 Altered chemical evolution in landfill leachate post implementation of biodegradable waste
 1232 diversion. *Waste Manage Res* 36, 857-868.
 1233 West, G.B., Brown, J.H., Enquist, B.J., (1997). A general model for the origin of allometric
 1234 scaling laws in biology. *Science* 276, 122-126.
 1235 White, J., Beaven, R.P., (2008) The role of pore space geometry, waste descriptors and micro-
 1236 scale network modelling in the design of macro-scale landfill models., *Global Waste*
 1237 *Management Symposium*
 1238 White, J.K., (2008). The application of LDAT to the HPM2 challenge. *Proceedings of the*
 1239 *Institution of Civil Engineers - Waste and Resource Management* 161, 137-146.
 1240 White, J.K., Beaven, R.P., (2013). Developments to a landfill processes model following its
 1241 application to two landfill modelling challenges. *Waste Manag* 33, 1969-1981.
 1242 White, J.K., Beaven, R.P., Powrie, W., Knox, K., (2011). Leachate recirculation in a landfill:
 1243 some insights obtained from the development of a simple 1-D model. *Waste Manag* 31, 1210-
 1244 1221.
 1245 White, J.K., Nayagum, D., Beaven, R.P., (2014). A multi-component two-phase flow algorithm
 1246 for use in landfill processes modelling. *Waste Manag* 34, 1644-1656.
 1247 Wildenschild, D., Sheppard, A.P., (2013). X-ray imaging and analysis techniques for quantifying
 1248 pore-scale structure and processes in subsurface porous medium systems. *Advances in Water*
 1249 *Resources* 51, 217-246.
 1250 Woodman, N.D., (2007). *Modelling of transport in highly heterogeneous porous media , with*
 1251 *application to the flushing of waste. University College London.*
 1252 Woodman, N.D., Rees-White, T.C., Beaven, R.P., Stringfellow, A.M., Barker, J.A., (2017).
 1253 Doublet tracer tests to determine the contaminant flushing properties of a municipal solid waste
 1254 landfill. *J Contam Hydrol*.
 1255 Woodman, N.D., Rees-White, T.C., Stringfellow, A.M., Beaven, R.P., Hudson, A.P., (2014).
 1256 Investigating the effect of compression on solute transport through degrading municipal solid
 1257 waste. *Waste Manag* 34, 2196-2208.
 1258 Woodman, N.D., Rees-White, T.C., Stringfellow, A.M., Beaven, R.P., Hudson, A.P., (2015).
 1259 Multiple-tracer tests for contaminant transport process identification in saturated municipal solid
 1260 waste. *Waste Manag* 38, 250-262.
 1261 Woodman, N.D., Siddiqui, A.A., Powrie, W., Stringfellow, A., Beaven, R.P., Richards, D.J.,
 1262 (2013). Quantifying the effect of settlement and gas on solute flow and transport through treated
 1263 municipal solid waste. *J Contam Hydrol* 153, 106-121.
 1264 Xie, S., Cheng, Q., Ling, Q., Li, B., Bao, Z., Fan, P., (2010). Fractal and multifractal analysis of
 1265 carbonate pore-scale digital images of petroleum reservoirs. *Marine and Petroleum Geology* 27,
 1266 476-485.
 1267 Ximenes, F., Bjordal, C., Cowie, A., Barlaz, M., (2015). The decay of wood in landfills in
 1268 contrasting climates in Australia. *Waste Manag* 41, 101-110.
 1269 Ximenes, F.A., Gardner, W.D., Cowie, A.L., (2008). The decomposition of wood products in
 1270 landfills in Sydney, Australia. *Waste Manag* 28, 2344-2354.
 1271 Xiong, Q., (2015). *Effect of Pore Space Evolution on Transport in Porous Media., School of*
 1272 *Mechanical, Aerospace & Civil Engineering. University of Manchester, Manchester, England.*
 1273 Xiong, Q., Baychev, T.G., Jivkov, A.P., (2016). Review of pore network modelling of porous
 1274 media: Experimental characterisations, network constructions and applications to reactive
 1275 transport. *J Contam Hydrol* 192, 101-117.

1276 Xu, P., (2015). A Discussion on Fractal Models for Transport Physics of Porous Media. *Fractals*
 1277 23.
 1278 Xu, P., Cai, J., Sasmito, A.P., Jangam, S.V., Yu, B., (2015). Transport Phenomena in Porous
 1279 Media and Fractal Geometry. *Journal of Chemistry* 2015, 1-2.
 1280 Zacharof, A.I., Butler, A.P., (2004a). Stochastic modelling of landfill leachate and biogas
 1281 production incorporating waste heterogeneity. Model formulation and uncertainty analysis.
 1282 *Waste Manag* 24, 453-462.
 1283 Zacharof, A.I., Butler, A.P., (2004b). Stochastic modelling of landfill processes incorporating
 1284 waste heterogeneity and data uncertainty. *Waste Manag* 24, 241-250.
 1285 Zeiss, C., (1992). Moisture flow through municipal solid waste: patterns and characteristics *J.*
 1286 *Environmental Systems* 22, 211-231.
 1287 Zekkos, D., (2005). Evaluation of Static and Dynamic Properties of Municipal Solid Waste. ,
 1288 Department of Civil and Environmental Engineering. University of California, Berkeley,
 1289 California, United States.
 1290 Zekkos, D., Kavazanjian, E., Bray, J.D., Matasovic, N., Riemer, M.F., (2010). Physical
 1291 Characterization of Municipal Solid Waste for Geotechnical Purposes. *J Geotech Geoenviron*
 1292 136, 1231-1241.
 1293 Zekkos, D., Matasovic, N., El-Sherbiny, R., Athanasopoulos-Zekkos, A., Towhata, I., Maugeri,
 1294 M., (2008). Chapter 4: Dynamic Properties of Municipal Solid Waste, in: Zekkos, D. (Ed.),
 1295 Geotechnical Characterization, Field Measurement, and Laboratory Testing of Municipal Solid
 1296 Waste, International Symposium on Waste Mechanics 2008. American Society of Civil
 1297 Engineers.
 1298 Zhang, L., Li, J., Tang, H., Guo, J., (2014). Fractal Pore Structure Model and Multilayer Fractal
 1299 Adsorption in Shale. *Fractals* 22.
 1300

Supporting Information

The Case for Examining Fluid Flow in Municipal Solid Waste at the Pore-Scale – A Review

AUTHOR NAMES

Syed Muaaz-Us-Salam, Peter John Cleall, Michael John Harbottle*

AUTHORS' ADDRESS

Geoenvironmental Research Centre, School of Engineering, Cardiff University, Wales, U.K.

AUTHOR INFORMATION

Corresponding Author*. Email: muaaz-us-salams@cardiff.ac.uk. ORCID: orcid.org/0000-0002-0848-8851

METHODOLOGY

In the first instance, we employed a similar strategy to that of Rummel et al. (2017).¹ The ISI Web of Science and Google Scholar databases were used to search for keywords and track citations from relevant papers (Table S1). In some instances, the authors' ResearchGate profiles were also used to look for publications that may have been missed otherwise. The publications citing the

16 following references and the bibliographies therein were also explored for possible inclusion
17 (Table S2).

18 **Table S1:** Results of ISI Web of Knowledge search queries conducted in September 2017.

Keywords	Search type and/or operator	Total results	Selected for inclusion	References
“municipal solid waste” + “transport” + “model”	TOPIC	270	20	Woodman et al. (2017) ² Audebert et al. (2016a) ³ Audebert et al. (2016b) ⁴ Woodman et al. (2015) ⁵ Woodman et al. (2014) ⁶ Woodman et al. (2013) ⁷ Saquing et al. (2012) ⁸ Han et al. (2011) ⁹ Fellner and Brunner (2010) ¹⁰ Kindlein et al. (2006) ¹¹ Statom et al., (2006) ¹² Rosqvist et al. (2005) ¹³ Haydar and Khire (2005) ¹⁴ Rosqvist and Destouni (2000) ¹⁵ McCreanor and Reinhart (2000) ¹⁶ Bendz and Singh (1999) ¹⁷ Uguccioni and Zeiss (1997) ¹⁸ ElFadel et al. (1997) ¹⁹ Di Bella et al. (2012) ²⁰ Al-Thani et al. (2004) ²¹
“landfill” + “leachate” + “modelling” + “flow”	Topic	348	9	Feng et al. (2017) ²² Slimani et al. (2017) ²³ Feng et al. (2017) ²⁴ Feng et al. (2016) ²⁴ Audebert et al. (2016a) ³ Audebert et al. (2016b) ⁴ Reddy et al. (2015) ²⁵ Feng et al. (2015) ²⁶ Tinet et al. (2011) ²⁷

19 **Table S2:** Results of citation tracking of selected references to capture similar references of
 20 interest. *
 21

Publication	Times cited	Selected for inclusion	References
Korfiatis et al. (1984) ²⁸	175	22	Rosqvist and Destouni (2000) ¹⁵ McCreanor and Reinhart (2000) ¹⁶ Haydar and Khire (2005) ¹⁴ Demetracopoulos et al. (1986) ²⁹ Khire and Mukherjee (2007) ³⁰ Noble and Arnold (1991) ³¹ Fellner and Brunner (2010) ¹⁰ Rosqvist et al. (2005) ¹³ McCreanor and Reinhart (1999) ³² Zeiss and Major (1992) ³³ Ahmed et al. (1992) ³⁴ Bendz et al. (1998) ³⁵ Demetracopoulos et al. (1986) ³⁶ Di Bella et al. (2012) ³⁰ Bendz and Singh et al. (1999) ¹⁷ Beaven and Kjeldsen (2010) ³⁷ Feng et al. (2015) ²⁶ Audebert et al. (2016a) ³ Audebert et al. (2016b) ⁴ Statom et al., (2006) ¹² Capelo and De Castro (2004) ³⁸ Feng and Zhang (2013) ³⁹
Audebert et al. (2016)	7	1	Donno and Cardarelli (2017) ⁴⁰
Bendz and Singh (1999)	17	6	Saquin et al. (2012) ⁸ Woodman et al. (2015) ⁵ Woodman et al. (2014) ⁶ Woodman et al. (2013) ⁷ Woodman (2008) ⁴¹ Caicedo (2013) ⁴²

Woodman et al. (2015)	7	2	Liu et al. (2016) ⁴³ Woodman et al. (2017) ²
Demetracopoulos et al. (1986) ³⁶	23	2	Khanbilvardi et al. (1995) ⁴⁴ Suk et al. (2000) ⁴⁵
Bendz et al. (1998) ³⁵	26	3	Sanchez et al. (2010) ⁴⁶ Zacharof and Butler (2004a) ⁴⁷ Han et al. (2011) ⁹
Zacharof and Butler (2004a) ⁴⁷	43	1	Zacharof and Butler (2004b) ⁴⁸
Zacharof and Butler (2004b) ⁴⁸	42	1	Kindlein et al. (2006) ¹¹
Kindlein et al. (2006) ¹¹	20	1	Agostini et al. (2012) ⁴⁹
Han et al. (2011) ⁹	20	1	Slimani et al. (2016) ²³
Ahmed et al. (1992) ³⁴	28	1	McDougall et al. (1996)
Khanbilvardi et al. (1995) ⁴⁴	55	1	Oman and Rosqvist (1999) ⁵⁰
Khire and Mukherjee (2007) ³⁰	68	1	Haydar and Khire (2007) ⁵¹
Suk et al. (2000) ⁴⁵	23	1	Fellner et al. (2009) ⁵²
Haydar and Khire (2005) ¹⁴	95	4	White et al. (2014) ⁵³ Reddy et al. (2014) ⁵⁴ Reddy et al. (2015) ²⁵ Khire and Kaushik (2012) ⁵⁵

22 *Searches conducted in October 2017 in the ISI Web of Knowledge and Google Scholar databases.

23 REFERENCES

- 24 1. Rummel, C. D.; Jahnke, A.; Gorokhova, E.; Kühnel, D.; Schmitt-Jansen, M., Impacts of
 25 Biofilm Formation on the Fate and Potential Effects of Microplastic in the Aquatic Environment.
 26 *Environmental Science & Technology Letters* **2017**, *4* (7), 258-267.
- 27 2. Woodman, N. D.; Rees-White, T. C.; Beaven, R. P.; Stringfellow, A. M.; Barker, J. A.,
 28 Doublet tracer tests to determine the contaminant flushing properties of a municipal solid waste
 29 landfill. *J Contam Hydrol* **2017**.
- 30 3. Audebert, M.; Clement, R.; Moreau, S.; Duquennoi, C.; Loisel, S.; Touze-Foltz, N.,
 31 Understanding leachate flow in municipal solid waste landfills by combining time-lapse ERT and
 32 subsurface flow modelling - Part I: Analysis of infiltration shape on two different waste deposit
 33 cells. *Waste Manag* **2016**, *55*, 165-75.
- 34 4. Audebert, M.; Oxarango, L.; Duquennoi, C.; Touze-Foltz, N.; Forquet, N.; Clement, R.,
 35 Understanding leachate flow in municipal solid waste landfills by combining time-lapse ERT and
 36 subsurface flow modelling - Part II: Constraint methodology of hydrodynamic models. *Waste*
 37 *Manag* **2016**, *55*, 176-90.
- 38 5. Woodman, N. D.; Rees-White, T. C.; Stringfellow, A. M.; Beaven, R. P.; Hudson, A. P.,
 39 Multiple-tracer tests for contaminant transport process identification in saturated municipal solid
 40 waste. *Waste Manag* **2015**, *38*, 250-62.
- 41 6. Woodman, N. D.; Rees-White, T. C.; Stringfellow, A. M.; Beaven, R. P.; Hudson, A. P.,
 42 Investigating the effect of compression on solute transport through degrading municipal solid
 43 waste. *Waste Manag* **2014**, *34* (11), 2196-208.
- 44 7. Woodman, N. D.; Siddiqui, A. A.; Powrie, W.; Stringfellow, A.; Beaven, R. P.; Richards,
 45 D. J., Quantifying the effect of settlement and gas on solute flow and transport through treated
 46 municipal solid waste. *J Contam Hydrol* **2013**, *153*, 106-21.
- 47 8. Saquing, J. M.; Knappe, D. R.; Barlaz, M. A., Fate and transport of phenol in a packed bed
 48 reactor containing simulated solid waste. *Waste Manag* **2012**, *32* (2), 327-34.
- 49 9. Han, B.; Scicchitano, V.; Imhoff, P. T., Measuring fluid flow properties of waste and
 50 assessing alternative conceptual models of pore structure. *Waste Manag* **2011**, *31* (3), 445-56.
- 51 10. Fellner, J.; Brunner, P. H., Modeling of leachate generation from MSW landfills by a 2-
 52 dimensional 2-domain approach. *Waste Manag* **2010**, *30* (11), 2084-95.
- 53 11. Kindlein, J.; Dinkler, D.; Ahrens, H., Numerical modelling of multiphase flow and
 54 transport processes in landfills. *Waste Manage Res* **2006**, *24* (4), 376-387.
- 55 12. Statom, R. A.; McCray, J. E.; Thyne, G. D., Conceptual model for landfill hydrologic
 56 transport developed using chloride tracer data and dual-domain modeling. *Environmental &*
 57 *Engineering Geoscience* **2006**, *12* (1), 67-78.
- 58 13. Rosqvist, N. H.; Dollar, L. H.; Fourie, A. B., Preferential flow in municipal solid waste and
 59 implications for long-term leachate quality: valuation of laboratory-scale experiments. *Waste*
 60 *Manage Res* **2005**, *23* (4), 367-380.
- 61 14. Haydar, M. M.; Khire, M. V., Leachate recirculation using horizontal trenches in bioreactor
 62 landfills. *J Geotech Geoenviron* **2005**, *131* (7), 837-847.
- 63 15. Rosqvist, H.; Destouni, G., Solute transport through preferential pathways in municipal
 64 solid waste. *Journal of Contaminant Hydrology* **2000**, *46* (1-2), 39-60.
- 65 16. McCreanor, P. T.; Reinhart, D. R., Mathematical modeling of leachate routing in a leachate
 66 recirculating landfill. *Water Res.* **2000**, *34* (4), 1285-1295.

17. Bendz, D.; Singh, V. P., Solute transport under steady and transient conditions in biodegraded municipal solid waste. *Water Resources Research* **1999**, *35* (8), 2333-2345.
18. Uguccioni, M.; Zeiss, C., Improvement of leachate prediction through municipal solid waste layers. *Journal of the American Water Resources Association* **1997**, *33* (6), 1265-1278.
19. El-Fadel, M.; Findikakis, A. N.; Leckie, J. O., Modeling Leachate Generation and Transport in Solid Waste Landfills. *Environmental Technology* **1997**, *18* (7), 669-686.
20. Di Bella, G.; Di Trapani, D.; Mannina, G.; Viviani, G., Modeling of perched leachate zone formation in municipal solid waste landfills. *Waste Manag* **2012**, *32* (3), 456-62.
21. Al-Thani, A. A.; Beaven, R. P.; White, J. K., Modelling flow to leachate wells in landfills. *Waste Manag* **2004**, *24* (3), 271-6.
22. Feng, S. J.; Cao, B. Y.; Xie, H. J., Modeling of leachate recirculation using combined drainage blanket-horizontal trench systems in bioreactor landfills. *Waste Manage Res* **2017**, *35* (10), 1072-1083.
23. Slimani, R.; Oxarango, L.; Sbartai, B.; Tinetti, A. J.; Olivier, F.; Dias, D., Leachate flow around a well in MSW landfill: Analysis of field tests using Richards model. *Waste Manag* **2016**.
24. Feng, S.-J.; Lu, S.-F.; Chen, H. X.; Fu, W.-D.; Lü, F., Three-dimensional modelling of coupled leachate and gas flow in bioreactor landfills. *Computers and Geotechnics* **2017**, *84*, 138-151.
25. Reddy, K. R.; Giri, R. K.; Kulkarni, H. S., Two-Phase Modeling of Leachate Recirculation Using Drainage Blankets in Bioreactor Landfills. *Environmental Modeling & Assessment* **2015**, *20* (5), 475-490.
26. Feng, S. J.; Cao, B. Y.; Zhang, X.; Xie, H. J., Modeling of leachate recirculation using vertical wells in bioreactor landfills. *Environ Sci Pollut Res Int* **2015**, *22* (12), 9067-79.
27. Tinetti, A. J.; Oxarango, L.; Bayard, R.; Benbelkacem, H.; Stoltz, G.; Staub, M. J.; Gourc, J. P., Experimental and theoretical assessment of the multi-domain flow behaviour in a waste body during leachate infiltration. *Waste Manag* **2011**, *31* (8), 1797-806.
28. Korfiatis, G. P.; Demetracopoulos, A. C.; Boudrodimos, E. L.; Nawy, E. G., Moisture Transport in a Solid-Waste Column. *J Environ Eng-Asce* **1984**, *110* (4), 780-796.
29. Demetracopoulos, A. C.; Sehayek, L.; Erdogan, H., Modeling Leachate Production from Municipal Landfills. *J Environ Eng-Asce* **1986**, *112* (5), 849-866.
30. Khire, M. V.; Mukherjee, M., Leachate injection using vertical wells in bioreactor landfills. *Waste Manag* **2007**, *27* (9), 1233-47.
31. Noble, J. J.; Arnold, A. E., Experimental and Mathematical Modeling of Moisture Transport in Landfills. *Chemical Engineering Communications* **1991**, *100* (1), 95-111.
32. McCreanor, P. T.; Reinhart, D. R., Hydrodynamic modeling of leachate recirculating landfills. *Waste Manage Res* **1999**, *17* (6), 465-469.
33. Zeiss, C., Moisture flow through municipal solid waste: patterns and characteristics *J. Environmental Systems* **1992**, *22* (3), 211-231.
34. Ahmed, S.; Khanbilvardi, R.; Fillos, J.; Gleason, P., Two-Dimensional Leachate Estimation through Landfills. *Journal of Hydraulic Engineering* **1992**, *118* (2), 306-322.
35. Bendz, D.; Singh, V. P.; Rosqvist, H.; Bengtsson, L., Kinematic wave model for water movement in municipal solid waste. *Water Resources Research* **1998**, *34* (11), 2963-2970.
36. Demetracopoulos, A. C.; Korfiatis, G. P.; Boudrodimos, E. L.; Nawy, E. G., Unsaturated Flow through Solid-Waste Landfills - Model and Sensitivity Analysis. *Water Resources Bulletin* **1986**, *22* (4), 601-609.

37. Kjeldsen, P.; Beaven, R. P., Landfilling: Hydrology. In *Solid Waste Technology & Management*, Christensen, T. H., Ed. Blackwell Publishing Ltd.: 2011; Vol. 2, pp 709-734.
38. Capelo, J.; Castro, M. A. H. D., Richards Equation Feasibility in Predicting Flow in Unsaturated Solid Waste at a Semi-Arid Tropical Landfill. *Journal of Environmental Systems* **2004**, *30* (3), 233-253.
39. Feng, S.; Zhang, X., Leachate recirculation using horizontal trenches considering the effect of MSW settlement. In *Coupled Phenomena in Environmental Geotechnics*, 2013; pp 329-333.
40. De Donno, G.; Cardarelli, E., Tomographic inversion of time-domain resistivity and chargeability data for the investigation of landfills using a priori information. *Waste Manag* **2017**, *59*, 302-315.
41. Woodman, N. D. Modelling of transport in highly heterogeneous porous media , with application to the flushing of waste. University College London, 2007.
42. Caicedo, D. M. A study of the structure in solid wastes and some implications for fluid flow in landfills. University of Southampton, 2013.
43. Liu, L.; Xue, Q.; Wan, Y.; Tian, Y., Evaluation of dual permeability of gas flow in municipal solid waste: Experiment and modeling. *Environmental Progress & Sustainable Energy* **2016**, *35* (1), 41-47.
44. Khanbilvardi, R. M.; Ahmed, S.; Gleason, P. J., Flow Investigation for Landfill Leachate (Fill). *J Environ Eng-Asce* **1995**, *121* (1), 45-57.
45. Suk, H.; Lee, K.-K.; Lee, C. H., Biologically Reactive Multispecies Transport in Sanitary Landfill. *Journal of Environmental Engineering* **2000**, *126* (5), 419-427.
46. Sanchez, R.; Tsotsis, T. T.; Sahimi, M., Computer simulation of gas generation and transport in landfills. IV. *Chemical Engineering Science* **2010**, *65* (3), 1212-1226.
47. Zacharof, A. I.; Butler, A. P., Stochastic modelling of landfill leachate and biogas production incorporating waste heterogeneity. Model formulation and uncertainty analysis. *Waste Manag* **2004**, *24* (5), 453-62.
48. Zacharof, A. I.; Butler, A. P., Stochastic modelling of landfill processes incorporating waste heterogeneity and data uncertainty. *Waste Manag* **2004**, *24* (3), 241-50.
49. Agostini, F.; Sundberg, C.; Navia, R., Is biodegradable waste a porous environment? A review. *Waste Manag Res* **2012**, *30* (10), 1001-15.
50. Oman, C.; Rosqvist, H., Transport fate of organic compounds with water through landfills. *Water Res.* **1999**, *33* (10), 2247-2254.
51. Haydar, M. M.; Khire, M. V., Leachate Recirculation Using Permeable Blankets in Engineered Landfills. *J Geotech Geoenviron* **2007**, *133* (4), 360-371.
52. Fellner, J.; Doberl, G.; Allgaier, G.; Brunner, P. H., Comparing field investigations with laboratory models to predict landfill leachate emissions. *Waste Manag* **2009**, *29* (6), 1844-51.
53. White, J. K.; Nayagum, D.; Beaven, R. P., A multi-component two-phase flow algorithm for use in landfill processes modelling. *Waste Manag* **2014**, *34* (9), 1644-56.
54. Reddy, K. R.; Giri, R. K.; Kulkarni, H. S., Validation of Two-Phase Flow Model for Leachate Recirculation in Bioreactor Landfills. *Journal of Waste Management* **2014**, *2014*, 1-24.
55. Khire, M. V.; Kaushik, T., Experimental and Numerical Evaluation of Liquid Injection using Horizontal Trench System for Bioreactor Landfills. In *GeoCongress*, ASCE: 2012.